



ACT MATERIALS RECOVERY FACILITY

ADDENDUM TO APPENDIX P

PRELIMINARY HAZARD ANALYSIS

Prepared for Veolia Environmental Services (Australia) Pty Ltd | 2 April 2025




Introduction

This report is prepared as an Addendum to *Appendix P Preliminary Hazard Analysis* prepared by GHD for ACT NoWaste in 2023 and submitted with a draft EIS for a new Materials Recovery Facility (MRF) on Block 12 Section 25 Hume, refer Figure 1.

Since that time ACT NoWaste has passed the responsibility to finalise the EIS to Veolia. GHD are not in a position to complete the EIS and as such, Veolia has engaged Element Environment to undertake this work.

Figure 1: Site Location

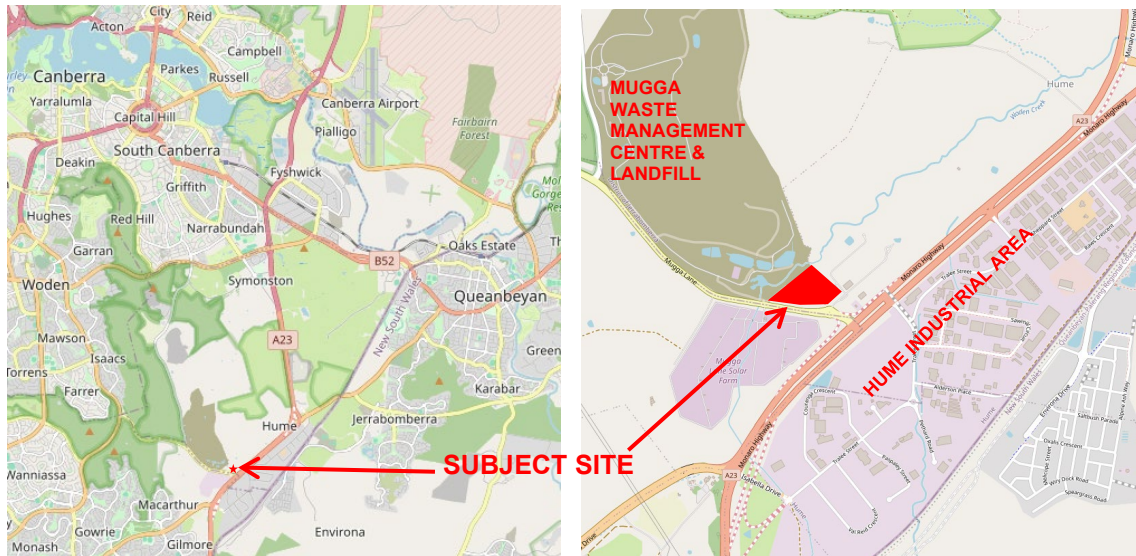


Veolia has made changes to the proposed site layout and design of the MRF to achieve operational efficiencies (refer Figure 2 & 3).

Figure 2: Veolia Revised Site Plan



Figure 3: GHD Concept Plan

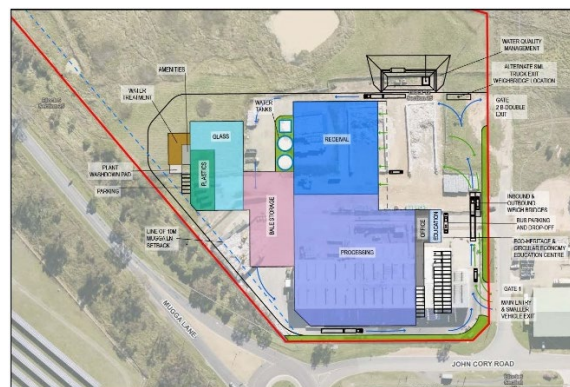

Assessment

The GHD preliminary hazard analysis (PHA) was undertaken to determine the risk to people, property and the environment. The PHA identified potential hazards and analysed these hazards in terms of their impact and their likelihood of occurrence. The resultant risk to surrounding land uses was quantified and the risk assessed to demonstrate that the proposal will not impose an unacceptable level of risk.

The most likely hazard scenarios that has the potential for off-site impact includes:

- Construction of the facility (noise and dust).
- Impacts from fires at the facility.

The revised site layout and changes to operation do not change any of the hazard scenarios considered in the GHD PHA report.

As such, the mitigation measures, which are repeated in Table 1 below, are considered relevant for the Veolia MRF development proposal.

Table 1: Mitigation measures to be implemented for the proposal

Potential impact	ID	Measures to reduce impact	Timing
Facility fire	HR01	A <i>Fire Management Plan</i> would be prepared for construction and operation.	Construction and operation
	HR02	Smoke detectors, fire extinguishers, fire blankets, fire hose reels and sprinklers would be appropriately placed within buildings. Early detection technologies such as CCTV, Thermal imaging equipment (TIE) using IR on stockpiles and product storage, zones identified to areas of risk, alert triggers, and 24h security monitoring.	Operation
	HR03	An <i>Emergency Management Plan</i> would be prepared, including locations and sizes of combustible material stockpiles and management of ignition sources and provision of access in line with ACT ESA requirements.	Operation
	HR04	Detailed design would ensure that the layout of the MRF would incorporate compartmentation and appropriate features as per AFAC and NSW guidelines for fire safety in waste management facilities (AFAC, 2022) (FRNSW, 2020).	Detailed design
	HR05	Separate gates would be provided for site access (delivery/pickup heavy vehicles and staff/visitors cars). The main entry gate includes the enclosure/box with the EMP, and directions to FIP and booster. Fire separation (between the receival hall and the processing area; and the storage area and the processing area) consistent with national construction code fire resistance level and the overall fire strategy of the Facility, including appropriately rated fire walls, doors, alarm, and suppression devices.	Operation
Hazardous/dangerous chemicals	HR06	Each chemical would have appropriate labelling, an appropriately sized bunds and stored within designated work areas.	Operation
	HR07	SWMS and procedures would be implemented for the handling of all chemicals including transfer, storage, spill prevention and clean up requirements.	Operation
	HR08	A SDS library would be located on-site that covers all chemicals used and/or stored on-site.	Operation
	HR09	Appropriate PPE would be provided for users of chemicals.	Operation
Wildlife strike	HR10	Organic material would not be stored on-site.	Operation
	HR11	Guideline C of NASF, Managing the Risk of Wildlife Strikes in the Vicinity of Airports would be adhered to.	Operation

Potential impact	ID	Measures to reduce impact	Timing
	HR12	Waste would be stored and processed in buildings or vessels.	Operation
	HR13	The proposal site would be kept clean and tidy.	Operation
	HR14	Waste from office and administration activities would be stored in appropriate bins (with lids).	Operation
	HR15	A <i>Waste Management Plan</i> would be created for the proposal site to continuously manage and monitor waste.	Operation
	HR16	Any unwanted putrescible waste sources would go into waste bins to be taken to landfill.	Operation
Failure of critical infrastructure	HR17	A regular maintenance schedule would be developed and undertaken by qualified personnel.	Operation
	HR18	Adequate training would be provided on operating machinery.	Operation
	HR19	The following plans would be developed to manage critical infrastructure: Business Continuity Plan. Asset Management Plan.	Operation

Conclusions

The GHD hazard and risk study demonstrated that the proposal could be designed, constructed and operated in a safe manner, that will meet relevant regulations, standards and policies. The assessment of the hazards through a qualitative PHA showed that the risk rating was medium, based on the implementation of control and mitigation measures. It is considered that with the implementation of these control and mitigation measures the Veolia proposal will have a similar risk rating.

Hume Materials Recovery Facility

Preliminary Hazard Analysis Report

Transport Canberra and City Services

18 May 2023

→ The Power of Commitment



Project name		Hume MRF					
Document title		Hume Materials Recovery Facility Preliminary Hazard Analysis Report					
Project number		12540460					
File name		12540460-REP_Hume Materials Recovery Facility Hazard and Risk Report.docx					
Status Code	Revision	Author	Reviewer		Approved for issue		
			Name	Signature	Name	Signature	Date
S4	0	F Duncan	A. Montgomery	* record on file	A. Montgomery	* record on file	15/08/23

GHD Pty Ltd | ABN 39 008 488 373

180 Lonsdale Street, Level 9

Melbourne, Victoria 3000, Australia

T +61 3 8687 8000 | **F** +61 3 8687 8522 | **E** melmail@ghd.com | **ghd.com**

© GHD 2023

This document is and shall remain the property of GHD. The document may only be used for the purpose for which it was commissioned and in accordance with the Terms of Engagement for the commission. Unauthorised use of this document in any form whatsoever is prohibited.

Executive summary

The proposed Hume Materials Recovery Facility (MRF) would be one of the first advanced facilities in Australia which would separate mixed plastics. The facility would provide higher quality recycled product that adds value and reduces the amount of waste ending up in landfill. Key features of the proposal include:

- Replacement of the old facility
- Additional warehouse style facilities with a floorspace of approximately 25,000 m² with 10 metres or higher clear spans
- Civil works and piling to support the dynamic loads imposed by rotating and high frequency vibrating equipment
- Expansion of hardstand space towards the west of the site
- The site will require a trade waste system to capture contaminated stormwater runoff.

The results of the hazard identification indicate that most risks have the potential for off-site impact. The most likely hazard scenarios that has the potential for off-site impact includes:

- potential threat of fire occurring at the facility, such as risk in relation to fire in stockpiled material
- storage of flammable materials on-site
- hazardous materials and dangerous chemicals to be used or stored on-site during construction and operation
- management procedures to be followed should critical infrastructure failure occur
- bird strikes to aircraft from an increase in birds attracted to waste storage

The assessment of the hazards through a qualitative PHA showed that the risk rating was medium or low, based on the implementation of control and mitigation measures. This is within the risk appetite of ACT NoWaste.

The hazard and risk study demonstrates that the proposal could be designed, constructed and operated in a safe manner, that will meet relevant regulations, standards and policies.

Contents

1. Introduction	1
1.1 Background	1
1.2 Purpose of this report	1
1.3 Limitations	2
2. Legislative and policy context and guidance	3
2.1 Planning and Development Act 2007	3
2.2 Environment, planning and sustainable development directorate requirements	3
3. Methodology	4
3.1 Hazard identification	4
3.2 Preliminary Hazard Analysis	4
4. Existing environment	5
5. Proposal description	6
6. Hazard Identification	8
7. Preliminary hazard analysis	11
7.1 Management of hazards	14
7.2 Summary of management measures	15
8. Conclusions	17

Table index

Table 1.1	Scoping document requirements	2
Table 5.1	Indicative processing volumes – existing MRF	7
Table 6.1	Identified hazards	8
Table 6.2	Indicative hazardous chemicals used during construction	9
Table 6.3	Indicative hazardous chemicals used during operation	9
Table 7.1	Hazard Identification	12
Table 7.2	Hazard and risk management measures	15

Figure index

Figure 4.1	Proposal location	5
Figure 5.1	Proposed MRF footprint overlaid on existing MRF site arrangement	7
Figure 8.1	TCCS Risk matrix	19
Figure 8.2	TCCS Consequence table	20

Appendices

Appendix A	Risk Matrix
Appendix B	Wildlife Management Plan
Appendix C	Example Safety Data Sheets

Terms and abbreviations

Abbreviation	Meaning
ACT	Australian Capital Territory
ADG	Australian dangerous good
AFAC	Australasian Fire And Emergency Services Authorities Council
AS	Australian Standard
DCOM	Design, Construct, Operate and Maintain
DG	Dangerous good
EIS	Environmental impact statement
EPSDD	Environment, Planning, and Sustainable Development Directorate
ESA	Emergency Services Agency (ACT)
FOGO	Food organics and garden organics
GHS	Global harmonised system
HDPE	High Density Poly Ethylene
HRRE	Hume Resource Recovery Estate
kg	Kilogram
MLRMC	Mugga Lane Resource Management Centre
MRF	Materials Recovery Facility
PD Act	<i>Planning and Development Act 2005</i>
PET	Polyethylene Terephthalate
PHA	Preliminary hazard analysis
PLM Act	<i>Australian Capital Territory (Planning and Land Management) Act 1988</i>
PPE	Personal protective equipment
SDS	Safety data sheet
SWMS	Safe work method statements
TaMS	Territory and Municipal Services Directorate
TCCS	Transport Canberra and City Services Directorate
tpa	Tonnes per annum

1. Introduction

1.1 Background

Transport Canberra and City Services (TCCS) Directorate proposes to construct a Hume Materials Recovery Facility (MRF), delivering additional warehouse structures and hardstand facilities to augment current operations. TCCS is the proponent and Crown Lessee of the land of the proposal. TCCS delivers a wide range of services and amenities across the Australian Capital Territory (ACT), including the maintenance and delivery of travel infrastructure, public transport services, urban spaces and waste and recycling services.

Within TCCS, ACT NoWaste delivers waste and recycling services and education across Canberra. Additionally, ACT NoWaste is the custodian of the MRF site and is responsible for licensing and regulatory compliance tasks for the MRF. TCCS recognises that Canberra is growing and in need of sustainable waste management solutions. As such, TCCS aims to maximise resource recovery and minimise material to landfill.

The commencement of the Council of Australian Governments (COAG) bans on exporting wastes overseas for processing has led to the creation of a Commonwealth recycling modernisation fund. This partnership between the Australian and ACT Governments would provide \$21 million to the Hume MRF to better separate and process recycling streams such as paper, glass, and plastic.

A MRF was operating on the proposal site until December 2022, when the facility was destroyed in a fire. It is proposed to construct a new MRF on the site with technological improvements to facilitate greater resource recovery by increasing the quality of recycled materials and reducing the amount of non-recyclable residual waste generated that is currently sent to landfill.

Prior to the fire, the MRF was processing approximately 65,000 tonnes per annum (tpa) of materials. The upgraded facility is intended to have a capacity of 115,000 tpa.

The Hume MRF would be one of the first advanced facilities in Australia which would separate mixed plastics. The facility would provide higher quality recycled product that adds value and reduces the amount of waste ending up in a landfill. Key features of the proposal include:

- Replacement and additional warehouse style facilities with a floor space of approximately 25,000 m² with 10 metres or higher clear spans.
- Civil works and piling to support the dynamic loads imposed by rotating and high frequency vibrating equipment.
- Expansion of hardstand space towards the west of the proposal site.
- The facility would require a trade waste system to capture contaminated stormwater runoff.

1.2 Purpose of this report

GHD Pty Ltd (GHD) was engaged by TCCS to prepare a preliminary risk screening and preliminary hazard analysis (PHA). This report will support the preparation of an Environmental Impact Statement (EIS) for the proposal.

This report addresses the relevant criteria in the ACT Government Environment, Planning and Sustainable Development Directorate final scoping document, issued 21 July 2022 (application number 202200011) for the proposal as outlined in Section 2.2 and assesses the hazards and risks associated with the.

This report focuses on hazards and risk associated with the activities connected to the proposal.

This report:

- Describes the existing environment with respect to the proposal and site hazards
- Describes the proposal in relation to hazardous materials and dangerous chemicals
- Recommends measures to mitigate the impacts identified.

1.2.1 Scoping document requirements

Table 1.1 Scoping document requirements

Requirement	Section addressed
Provide an assessment of the potential threat of fire occurring at the facility, such as risk in relation to fire in stockpiled material, any effect on the surrounding area that a fire may have, and the protection measures necessary to address the potential threat of fire.	Bushfire Risk Assessment
A bushfire assessment must be undertaken by a suitably qualified person.	Bushfire Risk Assessment
Consider how the development will limit the storage of flammable materials on-site during the bushfire danger period.	Section 6 and 7.1.3
A climate change risk assessment is required addressing the risk from increased events from flood, bushfire or extreme heat risk.	Climate Change EIS Chapter
Describe any hazardous materials and dangerous chemicals to be used or stored on site during construction and operation.	Section 7.1.3
Outline management procedures to be followed should critical infrastructure failure occur.	Section 7.1.6
Provide assessment and mitigation measures against the requirements of the “National Airport Safeguarding Framework (NASF)” and airport operations including “Guideline C - Managing the Risk of Wildlife Strikes in the Vicinity of Airports.”	Section 7.1.4
Provide a Wildlife Management Program in accordance with the NASF Guidelines.	Appendix B
Describe any hazardous materials and dangerous chemicals to be used or stored on site during construction and operation.	Section 6
Identify any Schedule 11 hazardous chemical, as per Work Health and Safety Regulation 2011 (WHS Regulation).	Section 6
Provide details of maximum storage capacities for any hazardous chemicals.	Section 6
Provide safety data sheets for any hazardous chemicals.	Appendix C
Identify whether any Schedule 11 hazardous chemicals meet the placard quantity as per the WHS Regulation.	Section 6
Describe how any potential hazardous materials will be transported to and from the site.	Section 6

1.3 Limitations

This report: has been prepared by GHD for TCCS and may only be used and relied on by TCCS for the purpose agreed between GHD and TCCS.

GHD otherwise disclaims responsibility to any person other than TCCS arising in connection with this report. GHD also excludes implied warranties and conditions, to the extent legally permissible.

The services undertaken by GHD in connection with preparing this report were limited to those specifically detailed in the report and are subject to the scope limitations set out in the report.

The opinions, conclusions and any recommendations in this report are based on conditions encountered and information reviewed at the date of preparation of the report. GHD has no responsibility or obligation to update this report to account for events or changes occurring subsequent to the date that the report was prepared.

The opinions, conclusions and any recommendations in this report are based on assumptions made by GHD described in this report. GHD disclaims liability arising from any of the assumptions being incorrect.

GHD has prepared this report on the basis of information provided by TCCS and others who provided information to GHD (including Government authorities), which GHD has not independently verified or checked beyond the agreed scope of work. GHD does not accept liability in connection with such unverified information, including errors and omissions in the report which were caused by errors or omissions in that information.

2. Legislative and policy context and guidance

2.1 Planning and Development Act 2007

The *Planning and Development Act 2007* (PD Act) is the key legislation informing planning and development on Territory land in the ACT.

The PD Act sets out requirements that include, but are not limited to, the provision of offsets and a policy to compensate for impacts that have significant adverse impacts on protected matters. It also provides the formal process for development approvals, the management of public land, and complaints and enforcement.

The Act also references Schedule 11 hazardous chemicals which are set out in the *ACT Work Health and Safety Regulations 2011*.

2.2 Environment, planning and sustainable development directorate requirements

The environment, planning and sustainable development directorate final scoping document, issued 21 July 2022 lists the requirements relevant to hazards and risk. This has been summarised in Section 1.2.1.

3. Methodology

The process to determine the potential hazards and risks of the proposal is included in the following sections.

3.1 Hazard identification

During the assessment of the proposal, a determination of whether the proposal poses significant risk is required. Hazard identification highlights any risks associated with the interaction of the proposal (as a whole) with the surrounding environment. This is a systematic process to identify any potential offsite impacts. The aim of the hazard identification process is to show the proposal does not pose any significant risk.

The hazard identification is a desktop qualitative assessment and involves documenting possible events that could lead to a possible off-site incident. The assessment then lists potential causes of the incident, as well as identification of operational and organisational safeguards to prevent the incidents from occurring or to mitigate their impact. The hazard identification is conducted for both construction and operation of the proposal .

3.2 Preliminary Hazard Analysis

A preliminary hazard analysis (PHA) is completed to determine the risk to people, property and the environment at the proposed location and in the presence of controls. Criteria of acceptability are used to determine if the development proposal is classified as a 'hazardous industry'. If this is the case, the development proposal may not be permissible within most industrial zonings in ACT.

The PHA will identify potential hazards, analyse these hazards in terms of their impact to people and the environment and their likelihood of occurrence, quantify the resultant risk to surrounding land uses and assess the risk to demonstrate that the proposal will not impose an unacceptable level of risk. Depending on the significance of consequences identified, a higher (or lower) level of analysis is required.

The proposed levels of PHA are:

- a qualitative PHA is completed for low potential for impact
- a semi-quantitative PHA is completed for medium potential for impact
- a fully quantitative PHA is completed for high potential for impact.

All PHA levels use an approach based on comprehensive hazard identification to demonstrate that the activity does not pose a significant risk. The PHA process complies with Australian Standard AS 31000:2018 risk management – principles and guidance, and follows the following steps:

- System definition
- Hazard identification
- Likelihood analysis
- Consequence analysis
- Risk calculations/ analysis
- Risk evaluation (compare against criteria and consider risk mitigation and management options)

4. Existing environment

To identify the hazards and risks, the existing environmental context must be set. Of note is the identification of sensitive receivers and predominate land use surrounding the aspects, as well as any potential interaction with other infrastructure or land.

Sensitive receivers are groups who are considered vulnerable or who have limited mobility, such as hospitals, schools and childcare facilities, aged care, and prisons. Other land use types include residential, industrial, open space/ recreation and commercial.

The proposal would be located (Figure 4.1) within the current bounds of the Hume Resource Recovery Estate (HRRE) on Block 12, Section 25 Hume, Recycling Road. The proposal site is surrounded by industrial facilities including:

- ACT Skip Hire across Recycling Road to the east
- Soft Landing Mattress Recycling located south-east, across John Cory Road
- Hume Industrial Estate located to the south and east across Monaro Highway
- Mugga Lane Landfill located approximately 200 metres to the north-west
- Future FOGO facility located east, across John Cory Road

The nearest residential receiver is approximately two kilometres to the west of the proposal site.

Mugga Lane Resource Management Centre (MLRMC) is to the north of the proposal site, the Mugga Lane Solar Park to the south-west, the yet-to-be-constructed food organics and garden organics (FOGO) facility to the north-east and general industrial area and the Monaro Highway lay to the east. The area is zoned as IZ1: General Industry. To the east, west and south the area is also zoned as General Industry. To the north, it is zoned as NUZ1: Non-Urban Broadacre.



Figure 4.1 Proposal location

5. Proposal description

The proposal involves the construction and operation of a new MRF with capacity to receive and process up to 115,000 tpa of comingled recycling and additional technologies for glass and plastics processing.

Glass separated in the processing building would undergo further processing onsite via washing, crushing and screening to produce clean, dry, graded aggregate suitable for beneficial uses.

The original intention was to continue to operate the MRF at full capacity during the construction phase of the proposal, with the area fenced off from construction works and operating separately to construction works. However, with the recent fire in December 2022, this is no longer necessary as the existing MRF requires full demolition.

The proposal aim is to replace and improve the previous MRF operations and provide:

- technical improvements to optically separate, identify, sort and segregate or bale specific marketable product streams
- technical improvements to separate, identify and sort single resin stream plastic products, like polyethylene terephthalate (PET) (clear and coloured), high density polyethylene (HDPE) (opaque and coloured) and potentially polypropylene (PP) to enable further processing such as flaking / pelletising and washing
- washing of glass, and granulating and washing PET, HDPE
- technical improvements to separate, crush, screen and wash glass sand, to nominally less than 5mm
- improved optical sorting to identify, separate, remove contaminants, quality control and bale paper and cardboard products
- improved and expand baling processes in the CDS separated materials
- improved and expand baling processes in the to enable these streams to be processed separately to prevent cross-contamination of kerbside collected beverage container materials (yellow bin co-mingled), and CDS materials
- technologies for optical sorting capability using material identification through processes like Near Infra-Red, colour and metal sensing
- optimised separation to capture live data for all processed waste streams and process manufacturing capabilities (inbound and outbound)
- an improved plant layout and manual sorting/quality control station ergonomics
- an upgrade to data collection, management, and analysis systems.

Key features of the proposal include:

- Replacement and additional warehouse style facilities with a floorspace of approximately 25,000 m² with ten metres or higher clear spans.
- Civil works and piling to support the dynamic loads imposed by rotating and high frequency vibrating equipment.
- Expansion of hardstand space towards the west of the site.
- A trade waste system to capture contaminated stormwater runoff.

The existing MRF was processing the indicative quantities of recyclables set out in Table 5.1 at the time it ceased operating due to the fire in December 2022. The new MRF would process this material and at least these volumes (indexed for population-driven volume growth) at the time it commences operation.

Table 5.1 *Indicative processing volumes – existing MRF*

Stream	Nominal output (tonnes per annum)
Mixed paper and cardboard	30,000
Mixed plastics	2,000
Glass	20,000
PET	1,500
HDPE	1,000
Aluminium and other metals	2,500
Refined product tonnes per annum	57,000
Residual waste	8,000
Total tonnes per annum	65,000

The design is subject to change with further consultation with relevant parties and design development. Figure 5.1 shows the footprint of the proposed facility.



Figure 5.1 *Proposed MRF footprint overlaid on existing MRF site arrangement*

6. Hazard Identification

The hazard identification was conducted as a desktop study and includes consideration of any hazard.

Table 6.1 lists the identified hazards associated with the proposal.

In undertaking the hazard identification study, the following qualifications are made:

- All equipment is installed and operated in accordance with appropriate Australian Standards, codes and guidelines
- All equipment and systems are designed to be inherently safe
- Both on-site and off-site risks are considered
- Bushfire risk is considered separately (refer to Section 20 of the EIS) and is not discussed further
- Climate change risk is considered separately (refer to Section 16 of the EIS) and is not discussed further

Table 6.1 *Identified hazards*

Hazard scenario	Phase	Causes	Consequence	Potential for off-site impact
Fire at facility	All proposal phases	<ul style="list-style-type: none"> – Accumulation of flammable waste product – Stockpiled material 	Personal injury Asset damage	Yes (health and environmental impact)
Hazardous chemicals spill	All proposal phases	Chemicals transfer/transport	Personal injury Environmental damage	No
Failure of critical infrastructure	Operational	Lack of maintenance	Loss of production Personal injury Asset damage	Not directly, but could cause inconvenience through inability to recycle
Bird strikes aircraft	Operational	Birds being attracted toward organic waste	Injury/ fatality to birds Asset damage	Yes (environmental impact)
Pilot distraction from lighting	Operational	Proximity to airport	Personal injury	Yes (health impact)
Dust	Construction	<ul style="list-style-type: none"> – Earth movement – Vehicle movement 	Complaints Environmental damage	Yes (health and environmental impact)
Noise	All proposal phases	<ul style="list-style-type: none"> – Heavy vehicle uses during construction – Equipment use 	Complaints	Yes (health impact)

Schedule 11 to the Work Health and Safety Regulations 2011, outlines the threshold quantities for placarding and providing a manifest for materials storage. A list of the expected hazardous chemicals to be used during construction and operation is shown in Table 6.2 and Table 6.3 respectively. Minimal chemicals are expected to be stored on site during construction. As the final chemical supply details are not finalised, example safety data sheets (SDS) are provided in Appendix C.

Table 6.2 *Indicative hazardous chemicals used during construction*

Product Name	UN number	GHS Class	GHS category	Indicative maximum Quantity (kg)	Schedule 11 placard threshold (litres)	Schedule 11 manifest threshold (litres)	Schedule 11 Requirements
Spray paint	multiple	Gas under pressure	Acute toxicity 1	0.02	50	500	None
LPG	1075	Flammable gas	1	0.09	200	5,000	None
Acetylene (welding)	1001	Flammable gas	1	0.01	200	5,000	None
Oxygen (welding)	1072	Gas under pressure	Other	0.05	1,000	10,000	None
Paint (oil based considered worst case)	1263	flammable liquid	2	0.1	in combination 1,000	in combination 10,000	None
Solvents	multiple	flammable liquid	3	0.1	in combination 1,000	in combination 10,000	None
Epoxy resins	multiple	flammable liquid	3	0.1	in combination 1,000	in combination 10,000	None
Diesel (C1)	3082	flammable liquid	4	2.5	10,000	100,000	None
General oils and lubricants (C2)	multiple	flammable liquid	4	0.5	10,000	100,000	None
Bitumen	3257	flammable liquid	4	-	10,000	100,000	None
Cleaning products	multiple	Eye irritation	1	0.005	None	None	None
Concrete	N/A	Not classified as DG		-	None	None	None
Steel structural members	N/A	Not classified as DG		-	None	None	None
Plasterboard	N/A	Not classified as DG		-	None	None	None
Sealants / joint fillers	N/A	Not classified as DG		0.05	None	None	None
Detergent	N/A	Not classified as DG		0.005	None	None	None

Table 6.3 *Indicative hazardous chemicals used during operation*

Product Name	UN number	GHS Class	GHS category	Maximum Quantity (kg)	Schedule 11 placard threshold (litres)	Schedule 11 manifest threshold (litres)	Schedule 11 Requirements
Diesel	3082	flammable liquid	4	2,000	10,000	100,000	None
Oils (motor/waste)	Multiple	flammable liquid	4	200	10,000	100,000	None
Treatment chemicals	Multiple	Corrosive liquids	1C	5,000	1,000	10,000	Provide placard requirements

Although no of the proposed hazardous chemicals trigger a requirement to have a manifest, a register of all chemicals used on-site, either during construction or operation is good practice, and should be kept on site. The register would include global harmonised system (GHS) and Australian dangerous goods (ADG) designations, quantities and storage locations. A current safety data sheet (SDS) should also be accessible to all personnel for all chemicals used on-site. Due to the quantity of corrosive treatment chemicals, they will require placarding.

The expectation is that any hazardous chemical will be transported to site following the ADG code requirements. Whilst diesel is likely to be trucked in via a bulk tanker and transferred to a fixed storage vessel, the other chemicals are expected to be transported in package form, for example a 1,000 litre iso-container and used as required.

To limit the potential of a fire initiating from diesel storage, it is recommended the goods are stored in dedicated locations away from potential ignition sources, as per Australian Standards AS 1940:2017 The Storage and Handling of Flammable and Combustible Liquids.

Results of the hazard identification indicate that most risks have the potential for off-site impact. The most likely hazard scenarios that has the potential for off-site impact includes:

- construction of the facility (dust and noise)
- impacts from fires at the facility
- failure of critical infrastructure
- bird strikes to aircraft from an increase in birds attracted to organic waste storage
- pilot distraction from lighting.

7. Preliminary hazard analysis

The results of the hazard identification process indicate that whilst there are several hazard scenarios that have the potential for off-site impact, it is considered that there is minimal, if any, potential for high-level harm. Therefore, a qualitative PHA is appropriate.

The hazard identified for the proposal, as discussed in Section 6 were risk assessed and the results are presented in Table 7.1. ACT NoWaste's risk matrix and risk criteria were used to assess the likelihood and consequence of the hazard with their existing controls.

The assessment of the hazards show that the risk is rated as medium, which is within the risk appetite of ACT NoWaste.

Recommended safeguards for each of the hazard scenarios have been included in Table 7.1 which contain, or control each of the hazards to an acceptable level.

The potential for unauthorised access resulting in safety risks is low, based on ACT workplace safety laws and the location of the site. A work health and safety management plan and safe work method statements would be developed in accordance with regulatory requirements.

Table 7.1 Hazard Identification

Hazard scenario	Phase	Causes	Consequence	Identified / recommended safeguards	Consequence rating	Likelihood rating	Risk rank
Fire at facility	Construction and Operational	-Accumulation of flammable waste product -Building/ electrical fire	<ul style="list-style-type: none"> - Personal injury - Asset damage 	<ul style="list-style-type: none"> - Design layout to incorporate compartmentation (as per AFAC and NSW Guidelines) and appropriate features required by the design basis to be incorporated in the detailed design by the DCOM Contractor - Fire Management Plan, including location and size of combustible material stockpiles and management of ignition sources - Appropriate placement of smoke detectors, fire extinguishers, fire blankets, fire hose reels and sprinklers - Separate gates for site access and consideration for fire rated walls between processing areas and combustible material storage - Emergency Management Plan 	Moderate (3)	Unlikely (2)	Medium
Hazardous chemicals spill	Operational	Chemicals transfer/ transport	<ul style="list-style-type: none"> - Personal injury - Environmental damage 	<ul style="list-style-type: none"> - Appropriate segregation and use of bunds - Licenced transporters of chemicals - Trained handlers of chemicals - Safe work method statements (SWMS) and procedures for the use of chemicals - Safety data sheets (SDS) for all chemicals used and/ or stored on-site - Personal protective equipment (PPE) 	Minor (2)	Unlikely (2)	Medium
Failure of critical infrastructure	Operational	Lack of maintenance	<ul style="list-style-type: none"> - Loss of production - Personal injury - Asset damage 	<ul style="list-style-type: none"> - Regular maintenance schedule undertaken by qualified personnel - Adequate training provided on operating machinery - Business Continuity Plan 	Moderate (3)	Rare (1)	Medium

Hazard scenario	Phase	Causes	Consequence	Identified / recommended safeguards	Consequence rating	Likelihood rating	Risk rank
Bird strikes aircraft	Operational	Birds being attracted toward organic waste in adjacent facilities	<ul style="list-style-type: none"> - Injury/ fatality to birds - Asset damage 	<ul style="list-style-type: none"> - Organic waste will not be stored in the MRF - Adhere to the Guideline C of NASF, Managing the Risk of Wildlife Strikes in the Vicinity of Airports - Recyclable materials will be held in dedicated sealed skip bins. This will be managed in accordance with the site operations plan and be serviced regularly by a waste contractor. - Waste from office and administration activities would be stored in appropriate bins (with lids). - The site would be kept clean and tidy - A Waste Management Plan is created for the site to continuously manage and monitor waste. - Any unwanted putrescible waste sources will go into waste bins to be taken to landfill. 	Moderate (3)	Rare (1)	Medium
Pilot distraction from lighting	Operation	Proximity to airport	<ul style="list-style-type: none"> - Personal injury 	<ul style="list-style-type: none"> - Nil 	Insignificant (1)	Rare (1)	Low
Noise	All proposal phases	<ul style="list-style-type: none"> -Heavy vehicle uses during construction -Equipment use 	<ul style="list-style-type: none"> - Complaints 	<ul style="list-style-type: none"> - Construction Management Plan - Equipment designed to minimise noise generation 	Minor (2)	Possible (3)	Medium
Dust	Construction	<ul style="list-style-type: none"> -Earth movement -Vehicle movement 	<ul style="list-style-type: none"> - Complaints - Environmental damage 	<ul style="list-style-type: none"> - Construction Management Plan - Water cart where appropriate 	Minor (2)	Possible (3)	Medium

7.1 Management of hazards

7.1.1 Construction management

Prior to construction starting, a construction management plan would be completed by the construction contractor. The purpose of this management plan is to describe how the construction contractor would manage and verify the safety compliance and risk aspects of the proposal works for the construction phase of the proposal, including a construction hazard assessment.

The construction hazard assessment would identify the proposed methodology of the site construction, particularly for hazardous situations. The detailed methodology would indicate the potential hazards and the control measures required to mitigate risks to as low as reasonably practicable during the construction stage.

The construction hazard assessment would produce a risk register, which would be treated as a live document to be regularly reviewed during the construction phase. Any information considered to be relevant to the operational phase would be carried forward in the risk register.

7.1.2 Fire management

ACT NoWaste should provide fire prevention, detection, protection and fighting measures that are appropriate for the specific fire hazard and adequate to meet the extent of potential fires. Specifically, the fire safety requirements of the Building Code of Australia would be applicable. This includes the provision of smoke detectors, fire extinguishers, fire blankets, fire hose reels and sprinklers where appropriate. All fire protection systems should be inspected and maintained in accordance with *AS1851-2012 Routine Service of Fire Protection Systems and Equipment*.

A focus of the design scope would be a reduction of the risk of a “total loss event” from fire risk profile within the MRF processing plant design. The Concept Design layout incorporates compartmentation (as per AFAC and NSW Guidelines) and appropriate features required by the design basis will be incorporated in the detailed design by the DCOM Contractor. The Concept Design will also include two separate gates for site access and notes the requirement for fire rated walls between processing areas and combustible material storage.

Early detection technologies such as intelligent monitoring and control systems incorporating forward looking infra-red cameras for stockpile monitoring and localised hot-spot detection would be incorporated. There will also be targeted extinguishing systems to contain the spread of fires before they take hold.

Incoming product stockpiles are to be kept in a tidy manner prior to processing and all efforts should be made to limit exposure to ignition sources. All hot works are to be undertaken in accordance with ACT NoWaste's hot work procedure and permit system in accordance with existing operations procedures to minimise the potential for flammable materials to be ignited. Regular maintenance of all mechanical components associated with the raw material delivery, shredding and mixing processes should also be undertaken to prevent overheating.

Fires would be managed in accordance with ACT NoWaste's emergency response procedures. If the fire cannot be extinguished immediately, local emergency services would be contacted to provide assistance.

7.1.3 Chemical management

There may be treatment chemicals (likely to be class 8) and at minimal quantities that will be used in the water recycling (plastics and glass washing) circuit on-site. That will likely be minimised or limited to avoid increasing trade waste discharge costs (for periodic discharge to sewer to limit total dissolved solids (salts) accumulation). The quantities are expected to be very minor/ incidental and not require hazardous chemical storage beyond self-bundled pallet or intermediate bulk containers (IBC).

To reduce the risk of a loss of containment of chemicals, chemical and spill management is required. Chemicals would be stored in accordance with Australian Standards. The storage locations would be within designated work areas. Each chemical would have appropriate labelling, an appropriately sized bund, separation where necessary and would be disposed of in accordance with Australian Standards.

Access to a safety data sheet (SDS) library that covers all chemicals located on-site is required, including being available for emergency services. Safety showers and eye wash stations would be installed in accordance with Australian Standards. Spill kits would be accessible to personnel in chemical storage areas.

Additionally, appropriate safe work procedures would be implemented for the handling of all chemicals including transfer, storage, spill prevention and clean up requirements.

7.1.4 Wildlife strikes aircraft

Guideline C of National Airports Safeguarding Framework (NASF), Managing the Risk of Wildlife Strikes in the Vicinity of Airports (Guideline C) aims to provide guidelines to land users and planning decision makers to manage the risk of collisions between wildlife and aircraft at or near airports where that risk may be increased by the presence of wildlife-attracting land uses. It is important to note that:

- Processed material will not be organic and will not attract wildlife. This material is inert and is not considered an attractant to birds.
- Processed material will be housed inside the building or in a semi-enclosed hardstand area adjacent to the building.
- The majority if the site activities are contained within an enclosed building, eliminating access to birds

Given that the risk of wildlife strike at this development is not increasing the risk in relation to an existing airport, further risk mitigation measure such as Wildlife Management Programs are not considered practicable.

7.1.5 Pilot distraction from lighting

The operating hours of the proposal do not include night-time operation. The proposal is also located on the site of a previously operating MRF. As such, the proposal is not expected to change the existing risk profile of pilot distraction from lighting, which is considered minimal given the proposal is located within existing suburban areas located around and between the MRF and the airport. Further mitigation is not considered practicable.

7.1.6 Failure of critical infrastructure

Management of critical infrastructure, including processes to follow should a failure occur, would be detailed in the facility's Asset Management Plan (AMP). The requirements and contents of the AMP would be subject to the final detail design and updated in conjunction with the maintenance schedule and operational contingency planning.

7.2 Summary of management measures

Mitigation measures that will be implemented to minimise the impacts of the MRF in Table 7.2.

Table 7.2 Hazard and risk management measures

Impact / Aspect	Mitigation Measure	Timing
Fire	<ul style="list-style-type: none"> – Fire Management Plan for construction and operations – Appropriate placement of smoke detectors, fire extinguishers, fire blankets, fire hose reels and sprinklers within buildings – Emergency Management Plan, including location and size of combustible material stockpiles and management of ignition sources – Design layout to incorporate compartmentation (as per AFAC and NSW Guidelines) and appropriate features required by the design basis will be incorporated in the detailed design by the DCOM Contractor – Separate gates for site access and consideration for fire rated walls between processing areas and combustible material storage 	Operation
Hazardous/ Dangerous chemicals	<ul style="list-style-type: none"> – Each chemical to have appropriate labelling, an appropriately sized bund and stored within designated work areas – Safe work method statements (SWMS) and procedures for the use of chemicals – Safety data sheets (SDS) for all chemicals used and/ or stored on-site 	Operation

Impact / Aspect	Mitigation Measure	Timing
	<ul style="list-style-type: none"> – Appropriate PPE provided for users of chemicals 	
Wildlife strikes aircraft	<ul style="list-style-type: none"> – Organic material would not be stored on-site – Adhere to the Guideline C of NASF, Managing the Risk of Wildlife Strikes in the Vicinity of Airports – Waste stored and processed in-buildings or vessels – The site would be kept clean and tidy – Waste from office and administration activities would be stored in appropriate bins (with lids). – A Waste Management Plan is created for the site to continuously manage and monitor waste. – Any unwanted putrescible waste sources will go into waste bins to be taken to landfill. 	Operation
Failure of critical infrastructure	<ul style="list-style-type: none"> – Regular maintenance schedule undertaken by qualified personnel – Adequate training provided on operating machinery – Business Continuity Plan – Asset Management Plan 	Operation

8. Conclusions

This report identified hazards associated with the Hume MRF in accordance with the requirements of the ACT Environment, Planning and Sustainable Development Directorate.

The results of the hazard identification indicate that most risks have the potential for off-site impact. The most likely hazard scenarios that has the potential for off-site impact includes:

- construction of the facility (noise and dust)
- impacts from fires at the facility.

The assessment of the hazards through a qualitative PHA showed that the risk rating was medium, based on the implementation of control and mitigation measures. This is within the risk appetite of ACT NoWaste.

The hazard and risk study demonstrates that the proposal could be designed, constructed and operated in a safe manner, that will meet relevant regulations, standards and policies.

Any changes to the assumptions used in this report should result in a review of the PHA process and an update as required.

Appendix A

Risk Matrix

RISK MATRIX		Impact	Insignificant	Minor	Moderate	Major	Catastrophic
Frequency		Matrix	1	2	3	4	5
Likelihood	Almost Certain	5	Medium	High	High	Extreme	Extreme
	Likely	4	Medium	Medium	High	High	Extreme
	Possible	3	Low	Medium	Medium	High	Extreme
	Unlikely	2	Low	Medium	Medium	High	High
	Rare	1	Low	Low	Medium	Medium	High

Figure 8.1 TCCS Risk matrix

Impact	Insignificant	Minor	Moderate	Major	Catastrophic
1. People (Health & Safety)	Near miss no injuries	Minor injury or requiring First Aid treatment or short-term injury (less than four weeks. and/or minor psychological injury.	Single injury causing hospitalisation or multiple medical treatment cases; and/or psychological injury resulting in GP/Health Professional help.	Serious injury (including loss of limbs) or multiple serious injuries causing hospitalisation and/or permanent disability; and/or psychological injury requiring medium professional support.	Single or multiple Deaths or multiple life-threatening injuries; and/or psychological injury requiring long term professional support.
2. Financial	Less than 1% of Budget	1% to 5% of Budget	> 5% to 10% of Budget	> 10% to 25% of Budget	> than 25% of Budget
3. Reputation & Image	Public Confidence: Minor dissatisfaction across a small proportion of the community and or stakeholder groups. Media: Isolated negative local media attention. Govt Scrutiny: Internal Review.	Public Confidence: Moderate dissatisfaction across a small proportion of the community and or stakeholder groups. Media: Negative Local media attention across multiple channels. Govt Scrutiny: Scrutiny required by internal committees or internal audit to prevent escalation.	Public Confidence: Dissatisfaction across a few demographics groups and or moderate dissatisfaction across multiple stakeholder groups. Media: Adverse national or sustained local media attention.(up to one week) Govt Scrutiny: Scrutiny required by external committees or ACT Auditor General's Office, or inquest, etc.	Public Confidence: Dissatisfaction across a large range of demographics groups. Major dissatisfaction across multiple stakeholder groups. Media: Sustained adverse national media attention across multiple media channels. (more than one week) Govt Scrutiny: Legislative Assembly scrutiny; Minister/Chief Minister involvement.	Public Confidence: Whole community dissatisfaction. Severe dissatisfaction across ALL stakeholder groups. Media: Adverse International media attention across multiple media channels. Govt Scrutiny: Ministerial/Assembly inquiry or Coronial inquiry.
4. Compliance & Regulation	Non-compliance with policy, contract or standard operating procedures which are not legislated or regulated.	Numerous instances of non-compliance with policy, contract or standard operating procedures which are not legislated or regulated.	Non-compliance with policy, contract or standard operating procedures which require self reporting to the appropriate regulator and immediate rectification.	Restriction of business operations by regulator due to non-compliance with guidelines and / or significant non-compliance with policy , contract or procedures which threaten business delivery.	Operations shut down by regulator for failing to comply with relevant legislation/regulations /or significant non-compliance with could result in failure to provide business objectives and critical service delivery.
5. Service Delivery (Products & Services)	Business Continuity: Loss of, or interruption to non-critical infrastructure or essential services up to 3 days. Strategic Objectives: Negligible impact on business outcomes. KPI's relating to delivery of strategic objectives not threatened.	Business Continuity: Interruption to core services affecting critical infrastructure or public safety or cessation of essential services for up to 3 days. Strategic Objectives: Minor impact on business outcomes and/or strategic objectives.	Business Continuity: Cessation of essential service ; infrastructure or public safety for up to 3 days and/or disruptions for up to 1 week. Strategic Objectives: Moderate impact on business outcomes and/or strategic objectives. One or more key accountability requirements not met.	Business Continuity: Cessation of business essential services for up to 3 days and/or continual disruption over subsequent weeks. Strategic Objectives: Significant impact on business outcomes and/or strategic objectives. Strategies not consistent with Government's agenda. KPI's show services are degraded.	Business Continuity: Total cessation of core services affecting critical infrastructure or public safety Cessation of services essential to business continuity for more than 1 week and/or continual disruption over subsequent months. Strategic Objectives: Strategic business processes fail and business objectives not met. Critical system failure/s Business severely affected.
6. Environment & Sustainability	Limited effect to environment, culture or something of low significance. Effects are limited to a small area, with a rapid recovery.	Transient, repairable. Minor effects to cultural or heritage items, environment including disturbance of native vegetation or waterways.	Moderate, short-term harm to cultural or heritage items or environment and/or disturbance of native vegetation or waterways. Mostly repairable.	Significant, medium-term harm. Major impacts to environment, threatened species or habitat, and/or damage to large area of native vegetation or waterways. Permanent damage to structures or items of cultural significance.	Long term environmental harm. Widespread impacts to environment, threatened species, native vegetation or waterways. Irreparable damage to, or loss of highly valued items of cultural and/ or heritage significance
7. ICT Systems & Record Management	Interruption to electronic records, data and systems access less than ½ day. Systems breach identified, business administration system, no personal or classified information stored.	Interruption to electronic records, data and systems access ½ to 1day. Systems breach identified, business administration system, some identifiable information stored, non client welfare threatening (data accessed known)	Significant interruption (but not permanent loss) to data and electronic records access , lasting 1 - 7 days. Systems breach identified, business administration system, some identifiable information stored, non client welfare threatening (data accessed unknown)	Complete, permanent loss of some electronic records and/or data , or loss of systems access for more than 7 days. Systems breach identified, business administration system, identifiable/classified information stored, non client welfare threatening	Complete, permanent loss of all electronic records, data or system access . Systems breach , Government or business Critical Systems client and or business welfare threatened
8. Integrated Public Transport Network	Unplanned network interruption resulting in cessation of services up to 10 minutes.	Unplanned network interruption resulting in cessation of services for between 10 and 30 minutes.	Unplanned network interruption resulting in cessation of services > 30 mins up to 4 hours.	Unplanned network interruption resulting in cessation of services > 4 hours up to 1 day.	Unplanned network interruption resulting in cessation of services for more than 2 days.
9. Project Delivery	Schedule Delay: Delays Less than 2 weeks impacting on achievement of key objectives or milestones. Quality: Single minor design and or quality issues – aesthetics.	Schedule Delay: Delays 2 - 4 weeks (inclusive) impacting on achievement of key objectives or milestones. Quality: Multiple minor design and or quality issues – aesthetics.	Schedule Delay: Delays 4 - 8 weeks (inclusive) impacting on achievement of key objectives or milestones. Quality: Single moderate design and or quality issue – fit for purpose, customer experience, urban design	Schedule Delay: Delays 8 - 12 weeks (inclusive) impacting on achievement of key objectives or milestones. Quality: Single major design and or quality issue – safety, design longevity and or performance or multiple moderate quality issues – fit for purpose, customer experience, urban design	Schedule Delay: Delays greater than 12 weeks impacting on achievement of key objectives or milestones. Quality: Multiple major design and or quality issues – safety, design longevity and or performance

Figure 8.2 TCCS Consequence table

Appendix B

Wildlife Management Plan

03 May 2023

Hume MRF and FOGO facility Wildlife Management Plan

1. Introduction

1.1 Legislative context

The following Wildlife Management Plan (WMP) for the proposed Hume Food and Garden Organics (FOGO) facility and Materials Recovery Facility (MRF) has been compiled to satisfy the requirements of the *National Airports Safeguarding Framework principles and guidelines* (DITRDCA, 2019). This framework has been established primarily to enhance current and future safety of aviation operations in Australia. Specifically, under guideline C of the framework, the risk of wildlife strikes in the vicinity of airports requires management.

According to this guideline, potentially incompatible land uses within 13 kilometres of airports should be managed. This includes land use that has the potential to attract large numbers of birds, such as rubbish dumps.

1.2 Proposed Hume FOGO and MRF developments

The proposed Hume FOGO and MRF are located approximately seven kilometres south of Canberra Airport, within the 13-kilometre buffer specified by the guideline (DITRDCA, 2019). Both proposals involve the construction of waste management facilities, with all waste processing activities to be undertaken internally within the fully enclosed facilities.

2. Wildlife management plan

2.1 Outline

According to point 22 of the guideline, suggestions for wildlife management to mitigate the risk of conflict with aviation traffic includes (DITRDCA, 2019):

- Regular monitoring surveys to monitor bird numbers at the site
- Wildlife hazard assessments by qualified ornithologists or biologists
- Wildlife awareness and management training for relevant staff
- Establishment of bird population triggers
- Implementation of activities to reduce hazardous bird populations
- Adoption of wildlife deterrent technologies to reduce hazardous bird populations.

Based on the proposed design, mitigation measures and operations of the facilities, habitat for birds within the broader locality as well as directly around the proposal sites that would not be removed and proximity to the nearest airport itself, the following measures are recommended (see section 2.2).

2.2 Management measures

To satisfy the guideline (DITRDCA, 2019), recommended wildlife population management measures for the proposal include:

1. ***Wildlife awareness and management training for relevant staff***

All staff at both the Hume FOGO and MRF should be trained to identify wildlife, specifically birds, and their behaviour and understand the habits of different species of birds that may be attracted to waste facilities for foraging opportunities. This may include smaller species like Ravens (*Corvus* spp.) as well as larger birds like the Australian White Ibis (*Threskiornis molucca*). Workers should be trained to identify flocking behaviour and assess if bird flocks are present during operation of the facilities. If large, sedentary, bird flocks are present once operation begins (greater than 20 individuals), then further management action may need to be undertaken, such as a wildlife hazard assessment by qualified ornithologists and the re-evaluation of management measures. However, as the operations for each facility would be entirely self-contained within the buildings on-site, this is expected to minimise the olfactory and visual cues that birds would typically use to locate waste sites for foraging (Rubene et al., 2019). Therefore, it is unlikely that birds would flock at the sites due to a lack of opportunities for foraging.

2. Wildlife hazard assessments by qualified ornithologists

As mentioned above, in the event that birds are flocking in significant numbers within groups that are sedentary, a wildlife hazard assessment should be undertaken by a suitably qualified ornithologist to assess the potential hazard level to aviation traffic from the presence of birds. The risk level to air traffic would vary depending on the size of any bird groupings present and the flight paths that aircraft take to the airport. With the proposed facilities located at a significant distance from the airport, this would further mitigate the risk associated to aircraft should any larger groups of birds be present. However, to be conservative, an assessment would need to be considered. This would provide an outline of associated risk levels as well as management measures.

3. Adoption of wildlife deterrent technologies to reduce hazardous bird populations

Consideration should be given to adopting wildlife deterrent technology only if a qualified ornithologist suggests that the risk level to aircraft is high and outlines potential deterrent measures to disperse local populations of any birds present at the sites. This would ultimately be informed by a wildlife hazard assessment, should it be necessary (as per above). Nonetheless, possible humane deterrents are bird spikes to prevent perching, drones to scare groups of birds and visual bird deterrents, however any methodology would be assessed and recommended by an ornithologist in the events it is deemed necessary.

4. Other measures

Considering that the proposed facilities are both partially or completely enclosed, the following other measures may be useful in preventing birds being attracted to the sites. These include:

- Ensuring all doors and other entrances remain closed when not in use to prevent the release of visual or odour cues that wildlife may utilise to detect possible foraging resources.
- Adequate measures to dispose of waste generated at the site itself and to ensure waste being brought to and from the sites is properly handled to prevent potential overflow of waste.

3. Conclusion

Based on the proposed development, it is unlikely that wildlife would be attracted to the sites in large numbers. Nonetheless, the management measures recommended here would help to ensure wildlife conflict is avoided and therefore satisfy the guidelines under the *National Airports Safeguarding Framework principles and guidelines*.

Regards

Rhys Cairncross
Graduate Ecologist

Rhys.Cairncross@ghd.com

Andrew Smith
Senior Ecologist

Andrew.Smith4@ghd.com

References

Department of Infrastructure, Transport, Regional Development, Communications and the Arts (DITRDCA). 2019. National Airports Safeguarding Framework principles and guidelines. Canberra, ACT.

GHD. 2023a. Hume FOGO Facility: Preliminary Hazard Analysis Report. Prepared for Transport Canberra and City Services Directorate.

GHD. 2023b. Materials Recovery Facility: Preliminary Hazard Analysis Report. Prepared for Transport Canberra and City Services Directorate.

Rubene, D., Leidefors, M., Ninkovic, V., Eggers, S., & Low, M. 2019. Disentangling olfactory and visual information used by field foraging birds. *Ecology and Evolution*, 9(1), 545-552.

Appendix C

Example Safety Data Sheets

1. IDENTIFICATION OF THE MATERIAL AND SUPPLIER

1.1 Product identifier

Product name ACETYLENE
Synonyms 001 - SDS NUMBER • 16110367F - MATERIAL NUMBER • DISSOLVED ACETYLENE • ETHYNE •
PRODUCT CODES: 040, 041

1.2 Uses and uses advised against

Uses FUEL • INDUSTRIAL APPLICATIONS

1.3 Details of the supplier of the product

Supplier name BOC LIMITED (AUSTRALIA)
Address 10 Julius Avenue, North Ryde, NSW, 2113, AUSTRALIA
Telephone 131 262, (02) 8874 4400
Website <http://www.boc.com.au>

1.4 Emergency telephone numbers

Emergency 1800 653 572 (24/7) (Australia only)

2. HAZARDS IDENTIFICATION

2.1 Classification of the substance or mixture

CLASSIFIED AS HAZARDOUS ACCORDING TO SAFE WORK AUSTRALIA CRITERIA

Physical Hazards

Flammable Gases: Category 1A
Chemically Unstable Gases: Category A
Gases Under Pressure: Dissolved gas

Health Hazards

Not classified as a Health Hazard

Environmental Hazards

Not classified as an Environmental Hazard

2.2 GHS Label elements

Signal word DANGER

Pictograms



Hazard statements

H220 Extremely flammable gas.
H230 May react explosively even in the absence of air.
H280 Contains gas under pressure; may explode if heated.

Prevention statements

P202 Do not handle until all safety precautions have been read and understood.
P210 Keep away from heat, hot surfaces, sparks, open flames and other ignition sources. No smoking.

PRODUCT NAME ACETYLENE**Response statements**

P377 Leaking gas fire: Do not extinguish, unless leak can be stopped safely.
P381 In case of leakage, eliminate all ignition sources.

Storage statements

P403 Store in a well-ventilated place.

Disposal statements

None allocated.

2.3 Other hazards

Asphyxiant. Effects are proportional to oxygen displacement.

3. COMPOSITION/ INFORMATION ON INGREDIENTS

3.1 Substances / Mixtures

Ingredient	CAS Number	EC Number	Content (v/v)
ACETYLENE	74-86-2	200-816-9	>98%

4. FIRST AID MEASURES

4.1 Description of first aid measures

Eye Adverse effects not expected from this product.
Inhalation If inhaled, remove from contaminated area. To protect rescuer, use an Air-line respirator or Self Contained Breathing Apparatus (SCBA). Be aware of possible explosive atmospheres. Apply artificial respiration if not breathing. Give oxygen if available. For advice, contact a Poisons Information Centre on 13 11 26 (Australia Wide) or a doctor.
Skin Adverse effects not expected from this product.
Ingestion Ingestion is not considered a potential route of exposure.
First aid facilities None allocated.

4.2 Most important symptoms and effects, both acute and delayed

In high concentrations may cause asphyxiation. Symptoms may include loss of mobility / consciousness. Victim may not be aware of asphyxiation. In low concentrations may cause narcotic effects. Symptoms may include dizziness, headache, nausea and loss of co-ordination.

4.3 Immediate medical attention and special treatment needed

Treat for asphyxia.

5. FIRE FIGHTING MEASURES

5.1 Extinguishing media

Stop flow of gas if safe to do so, such as by slowly closing the cylinder valve. If the gas source cannot be isolated, do not extinguish the flame, since re-ignition and explosion could occur. Await arrival of emergency services or manufacturer's advisor. Drench and cool cylinders with water spray from protected area at a safe distance. If it is absolutely necessary to extinguish the flame, use only a dry chemical powder extinguisher. Do not move cylinders for at least 24 hours. Avoid shock and bumps to cylinders.

5.2 Special hazards arising from the substance or mixture

Extremely flammable. Eliminate all ignition sources including cigarettes, open flames, spark producing switches/tools, heaters, naked lights, pilot lights, mobile phones etc. when handling.

5.3 Advice for firefighters

Temperatures in a fire may cause cylinders to rupture and internal pressure relief devices to be activated. Cool cylinders or containers exposed to fire by applying water from a protected location. Do not approach cylinders or containers suspected of being hot. This material is capable of forming explosive mixtures in air. May react explosively even in the absence of air.

5.4 Hazchem code

2SE
2 Fine Water Spray.
S Risk of violent reaction or explosion. Wear full fire kit and breathing apparatus. Dilute spill and run-off.
E Evacuation of people in and around the immediate vicinity of the incident should be considered.

6. ACCIDENTAL RELEASE MEASURES

6.1 Personal precautions, protective equipment and emergency procedures

If the cylinder is leaking, evacuate area of personnel. Inform manufacturer/supplier of leak. Wear self-contained breathing apparatus when entering area unless atmosphere is proved to be safe. Ensure adequate air ventilation. Eliminate all sources of ignition. Consider the risk of potentially explosive atmospheres.

6.2 Environmental precautions

Prevent from entering sewers, basements and workpits, or any place where its accumulation can be dangerous.

6.3 Methods of cleaning up

Carefully move material to a well ventilated remote area, then allow to discharge if safe to do so. Do not attempt to repair leaking valve or cylinder safety devices.

6.4 Reference to other sections

See Sections 8 and 13 for exposure controls and disposal.

7. HANDLING AND STORAGE

7.1 Precautions for safe handling

Use of safe work practices are recommended to avoid inhalation. Do not drag, drop, slide or roll cylinders. The uncontrolled release of a gas under pressure may cause physical harm. Use a suitable hand truck for cylinder movement. Never open an acetylene cylinder valve without the regulator attached. Gas regulator of suitable pressure and flow rating fitted to cylinder and manifold with low pressure gas distribution equipment which controls fuel gas mixture and flame. The regulator and other equipment must be compatible with the product and suited for the particular use. Never "sniff" acetylene as it may ignite spontaneously. Instead, carefully inspect the outlet and if there are any signs of dirt, blow it out with a jet of clean compressed air or nitrogen.

7.2 Conditions for safe storage, including any incompatibilities

Do not store near incompatible substances and sources of ignition. Cylinders should be stored: upright, prevented from falling, in a secure area; below 65°C, in a dry, well ventilated area constructed of non-combustible material with firm level floor (preferably concrete), away from areas of heavy traffic and emergency exits. Post "No Smoking or Open Flames" signs in the storage areas. Refer to applicable legislation on flammable storage quantity restrictions. Never transfer acetylene to another cylinder or other container.

7.3 Specific end uses

No information provided.

8. EXPOSURE CONTROLS / PERSONAL PROTECTION

8.1 Control parameters

Exposure standards

Ingredient	Reference	TWA		STEL	
		ppm	mg/m ³	ppm	mg/m ³
Acetylene	SWA [AUS]	Asphyxiant			

Biological limits

No biological limit values have been entered for this product.

8.2 Exposure controls


Engineering controls

Provide suitable ventilation to minimise or eliminate exposure. Confined areas (e.g. tanks) should be adequately ventilated or gas tested. Flammable/explosive vapours may accumulate in poorly ventilated areas.

PRODUCT NAME ACETYLENE

PPE

Eye / Face	Wear safety glasses.
Hands	Wear leather or cotton gloves.
Body	Wear coveralls and safety boots.
Respiratory	If using product in a confined area, wear an Air-line respirator.



9. PHYSICAL AND CHEMICAL PROPERTIES

9.1 Information on basic physical and chemical properties

Appearance	COLOURLESS GAS
Odour	GARLIC-LIKE ODOUR
Flammability	EXTREMELY FLAMMABLE
Flash point	< 23°C
Boiling point	-84°C
Melting point	NOT AVAILABLE
Evaporation rate	NOT APPLICABLE
pH	NOT APPLICABLE
Vapour density	0.906 (Air = 1)
Relative density	NOT APPLICABLE
Solubility (water)	SOLUBLE
Vapour pressure	4700 kPa @ 25°C
Upper explosion limit	100 %
Lower explosion limit	2.3 %
Partition coefficient	NOT AVAILABLE
Autoignition temperature	305°C
Decomposition temperature	NOT AVAILABLE
Viscosity	NOT AVAILABLE
Explosive properties	NOT AVAILABLE
Oxidising properties	NOT AVAILABLE
Odour threshold	NOT AVAILABLE

9.2 Other information

% Volatiles	100 %
Critical pressure	6,242 kPa
Critical temperature	36.3°C (dissolved in acetone and porous medium)
Cylinder pressure (when full)	1550 kPa @ 15°C

10. STABILITY AND REACTIVITY

10.1 Reactivity

Forms explosive acetylides with copper, silver and mercury. Do not use alloys containing more than 65% copper.

10.2 Chemical stability

Generally stable under recommended conditions of storage. However, sensitive to heat or shock and may become explosive, even in the absence of air.

10.3 Possibility of hazardous reactions

Polymerises with evolution of heat. Avoid contact with curing agents, accelerators, and/or initiators.

10.4 Conditions to avoid

Avoid shock, friction, heavy impact, heat, sparks, open flames and other ignition sources.

10.5 Incompatible materials

Incompatible with oxidising agents (e.g. hypochlorites), copper, copper alloys (>70% copper), silver and mercury to form explosive acetylides. May decompose violently at high temperatures and/or pressures or in the presence of a catalyst. Hazardous by-products may be produced when this gas/gas mixture is used in welding, cutting and associated processes.

10.6 Hazardous decomposition products

May evolve toxic gases if heated to decomposition.

11. TOXICOLOGICAL INFORMATION

11.1 Information on toxicological effects

Acute toxicity	Based on available data, the classification criteria are not met.
Skin	Not classified as a skin irritant.
Eye	Not classified as an eye irritant.
Sensitisation	Not classified as causing skin or respiratory sensitisation.
Mutagenicity	Not classified as a mutagen.
Carcinogenicity	Not classified as a carcinogen.
Reproductive	Not classified as a reproductive toxin.
STOT - single exposure	Asphyxiant. Effects are proportional to oxygen displacement. Over exposure may result in dizziness, drowsiness, weakness, fatigue, breathing difficulties and unconsciousness.
STOT - repeated exposure	Not classified as causing organ damage from repeated exposure.
Aspiration	Not classified as causing aspiration.

12. ECOLOGICAL INFORMATION

12.1 Toxicity

No ecological damage is expected to be caused by this product.

12.2 Persistence and degradability

No information provided.

12.3 Bioaccumulative potential

This product is not expected to bioaccumulate.

12.4 Mobility in soil

Because of its high volatility, the product is unlikely to cause ground or water pollution.

12.5 Other adverse effects

No known effects from this product. Fume from fabrication processes which use this gas/gas mixture may be harmful to the environment.

13. DISPOSAL CONSIDERATIONS

13.1 Waste treatment methods

Waste disposal	Cylinders should be returned to the manufacturer or supplier for disposal of contents.
Legislation	Dispose of in accordance with relevant local legislation.

14. TRANSPORT INFORMATION

CLASSIFIED AS A DANGEROUS GOOD BY THE CRITERIA OF THE ADG CODE



PRODUCT NAME ACETYLENE

	LAND TRANSPORT (ADG)	SEA TRANSPORT (IMDG / IMO)	AIR TRANSPORT (IATA / ICAO)
14.1 UN Number	1001	1001	1001
14.2 Proper Shipping Name	ACETYLENE, DISSOLVED	ACETYLENE, DISSOLVED	ACETYLENE, DISSOLVED
14.3 Transport hazard class	2.1	2.1	2.1
14.4 Packing Group	None allocated.	None allocated.	None allocated.

14.5 Environmental hazards

No information provided.

14.6 Special precautions for user

Hazchem code 2SE

GTEPG 2A1

EmS F-D, S-U

Other information

Refer to Commonwealth, State and Territory Dangerous Goods Legislation which contain requirements which affect gas storage and transport. Special transport precautions: Avoid transport on vehicles where the load space is not separated from the driver's compartment. Ensure vehicle driver is aware of the potential hazards of the load and knows what to do in the event of an accident or an emergency.

Before transporting product containers:

Ensure there is adequate ventilation.

Ensure that containers are firmly secured.

Ensure cylinder valve is closed and not leaking.

Ensure valve outlet cap nut or plug (where provided) is correctly fitted.

Ensure valve protection device (where provided) is correctly fitted.

15. REGULATORY INFORMATION**15.1 Safety, health and environmental regulations/legislation specific for the substance or mixture**

Poison schedule A poison schedule number has not been allocated to this product using the criteria in the Standard for the Uniform Scheduling of Medicines and Poisons (SUSMP).

Classifications Safe Work Australia criteria is based on the Globally Harmonised System (GHS) of Classification and Labelling of Chemicals (GHS Revision 7).

Inventory listings **AUSTRALIA: AIIC (Australian Inventory of Industrial Chemicals)**
All components are listed on AIIC, or are exempt.

16. OTHER INFORMATION

Additional information The storage of significant quantities of gas cylinders must comply with AS4332 The storage and handling of gases in cylinders.

When using this gas/gas mixture for welding, cutting and associated processes, additional hazards may be generated by the process such as radiation, noise and fume. Risk assessments should be made for each activity to identify and quantify the individual hazards involved. Please refer to the relevant Safety Data Sheets for the welding consumables being used or, if available, the materials being welded.

PERSONAL PROTECTIVE EQUIPMENT GUIDELINES:

The recommendation for protective equipment contained within this report is provided as a guide only. Factors such as form of product, method of application, working environment, quantity used, product concentration and the availability of engineering controls should be considered before final selection of personal protective equipment is made.

HEALTH EFFECTS FROM EXPOSURE:

It should be noted that the effects from exposure to this product will depend on several factors including: form of product; frequency and duration of use; quantity used; effectiveness of control measures; protective equipment used and method of application. Given that it is impractical to prepare a report which would encompass all possible scenarios, it is anticipated that users will assess the risks and apply control methods where appropriate.

Abbreviations

ACGIH	American Conference of Governmental Industrial Hygienists
CAS #	Chemical Abstract Service number - used to uniquely identify chemical compounds
CNS	Central Nervous System
EC No.	EC No - European Community Number
EMS	Emergency Schedules (Emergency Procedures for Ships Carrying Dangerous Goods)
GHS	Globally Harmonized System
GTEPG	Group Text Emergency Procedure Guide
IARC	International Agency for Research on Cancer
LC50	Lethal Concentration, 50% / Median Lethal Concentration
LD50	Lethal Dose, 50% / Median Lethal Dose
mg/m ³	Milligrams per Cubic Metre
OEL	Occupational Exposure Limit
pH	relates to hydrogen ion concentration using a scale of 0 (high acidic) to 14 (highly alkaline).
ppm	Parts Per Million
STEL	Short-Term Exposure Limit
STOT-RE	Specific target organ toxicity (repeated exposure)
STOT-SE	Specific target organ toxicity (single exposure)
SUSMP	Standard for the Uniform Scheduling of Medicines and Poisons
SWA	Safe Work Australia
TLV	Threshold Limit Value
TWA	Time Weighted Average

Report status

This document has been compiled by RMT on behalf of the manufacturer, importer or supplier of the product and serves as their Safety Data Sheet ('SDS').

It is based on information concerning the product which has been provided to RMT by the manufacturer, importer or supplier or obtained from third party sources and is believed to represent the current state of knowledge as to the appropriate safety and handling precautions for the product at the time of issue. Further clarification regarding any aspect of the product should be obtained directly from the manufacturer, importer or supplier.

While RMT has taken all due care to include accurate and up-to-date information in this SDS, it does not provide any warranty as to accuracy or completeness. As far as lawfully possible, RMT accepts no liability for any loss, injury or damage (including consequential loss) which may be suffered or incurred by any person as a consequence of their reliance on the information contained in this SDS.

Prepared by

Risk Management Technologies
5 Ventnor Ave, West Perth
Western Australia 6005
Phone: +61 8 9322 1711
Fax: +61 8 9322 1794
Email: info@rmt.com.au
Web: www.rmtglobal.com

[End of SDS]

BORAL ASPHALT Safety Data Sheet



www.boral.com.au

1. IDENTIFICATION OF THE MATERIAL AND SUPPLIER

1.1 Product identifier

Product name BITUMEN
Synonym(s) BITUMEN CLASS 170, 240, 320, 450, 600

1.2 Uses and uses advised against

Use(s) BITUMEN • PAVING • ROAD MAKING

1.3 Details of the supplier of the product

Supplier name BORAL CONSTRUCTION MATERIALS LTD.
Address Level 3, 40 Mount Street, Nth Sydney, NSW, 2060, AUSTRALIA
Telephone (02) 9220 6300
Email sds@rmt.com.au
Website www.boral.com.au

1.4 Emergency telephone number(s)

Emergency 1800 555 477 (6.30am – 5pm WST)
Emergency (A/H) 13 11 26 (Poisons Information Centre)

2. HAZARDS IDENTIFICATION

2.1 Classification of the substance or mixture

NOT CLASSIFIED AS HAZARDOUS ACCORDING TO SAFE WORK AUSTRALIA CRITERIA

GHS classification(s) Flammable Liquids: Category 4

2.2 Label elements

Signal word WARNING

Pictogram(s)

None allocated.

Hazard statement(s)

H227 Combustible liquid.

Prevention statement(s)

P210 Keep away from heat/sparks/open flames/hot surfaces. No smoking.
P280 Wear protective gloves/protective clothing/eye protection/face protection.

Response statement(s)

P370 + P378 In case of fire: Use appropriate media for extinction.

Storage statement(s)

P403 + P235 Store in a well-ventilated place. Keep cool.

Disposal statement(s)

P501 Dispose of contents/container in accordance with relevant regulations.

2.3 Other hazards

Contact with molten product can result in thermal burns. Bitumens, occupational exposure to straight-run bitumens and their emissions during road paving, are classified as possibly carcinogenic to humans (IARC Group 2B).

3. COMPOSITION/ INFORMATION ON INGREDIENTS

3.1 Substances / Mixtures

Ingredient	CAS Number	EC Number	Content
BITUMEN	8052-42-4	232-490-9	>99%
BITUMEN (OXIDISED)	64742-93-4	265-196-4	>99%
HYDROGEN SULPHIDE	7783-06-4	231-977-3	<0.01%
RESIDUES, PETROLEUM, VACUUM	64741-56-6	265-057-8	<0.01%

4. FIRST AID MEASURES

4.1 Description of first aid measures

Eye	If contact with hot material occurs, flush gently with cold running water. Adhered material should only be removed under the medical direction. Seek immediate medical advice.
Inhalation	If inhaled, remove from contaminated area. To protect rescuer, use a Type A (Organic vapour) respirator or an Air-line respirator (in poorly ventilated areas). Apply artificial respiration if not breathing.
Skin	If contact with hot material occurs, drench area immediately with cold water, do not attempt to remove material adhered to the skin. Seek immediate medical attention.
Ingestion	For advice, contact a Poisons Information Centre on 13 11 26 (Australia Wide) or a doctor (at once). If swallowed, do not induce vomiting. Ingestion is considered unlikely due to product form.
First aid facilities	Eye wash facilities and safety shower are recommended.

4.2 Most important symptoms and effects, both acute and delayed

Avoid contact with hot material, as burns may result.

4.3 Immediate medical attention and special treatment needed

Burns caused by bitumen require special medical treatment. Consultation with a burns specialist experienced in bitumen burns is advisable in the first instance.

Refer to the Australian Asphalt Pavement Association (AAPA) bitumen burns card for further information (<http://www.aapa.asn.au>).

Bitumen burns: If hot bitumen contacts the skin, flush immediately with water and make no attempt to remove it. Use wet, cold towels if face, neck, shoulder or back etc are burnt. Cool burn areas for 30 minutes and seek immediate medical attention. Where bitumen completely circles a limb, it may have a tourniquet effect and should be split longitudinally as it cools. If eye burns result flush with water for 15 minutes, pad and seek immediate medical attention.

5. FIRE FIGHTING MEASURES

5.1 Extinguishing media

In case of fire, use water fog, foam, dry chemical or carbon dioxide extinguisher or spray. Do not use water jets.

5.2 Special hazards arising from the substance or mixture

Combustible. May evolve toxic gases (carbon/ sulphur/ nitrogen oxides, hydrogen sulphide, hydrocarbons) when heated to decomposition.

5.3 Advice for firefighters

Evacuate area and contact emergency services. Toxic gases may be evolved in a fire situation. Remain upwind and notify those downwind of hazard. Wear full protective equipment including Self Contained Breathing Apparatus (SCBA) when combating fire. Use waterfog to cool intact containers and nearby storage areas.

5.4 Hazchem code

2W

Fine Water Spray.

W

Risk of violent reaction or explosion. Wear liquid-tight chemical protective clothing and breathing apparatus. Contain spill and run-off.

6. ACCIDENTAL RELEASE MEASURES

6.1 Personal precautions, protective equipment and emergency procedures

Wear Personal Protective Equipment (PPE) as detailed in section 8 of the SDS. Clear area of all unprotected personnel. Ventilate area where possible. Allow material to cool. Contact emergency services where appropriate.

PRODUCT NAME BITUMEN

6.2 Environmental precautions

Contain material and prevent product from entering drains and waterways. Collect and seal in properly labelled containers for disposal. If contamination of sewers or waterways has occurred, contact local emergency services.

6.3 Methods of cleaning up

Contain spillage, then cover / absorb spill with non-combustible absorbent material (vermiculite, sand, or similar), collect and place in suitable containers for disposal. Eliminate all sources of ignition.

6.4 Reference to other sections

See Sections 8 and 13 for exposure controls and disposal.

7. HANDLING AND STORAGE

7.1 Precautions for safe handling

Before use carefully read the product label. Use of safe work practices are recommended to avoid eye or skin contact and inhalation. Observe good personal hygiene, including washing hands before eating. Prohibit eating, drinking and smoking in contaminated areas.

7.2 Conditions for safe storage, including any incompatibilities

Store in a well ventilated area removed from ignition sources, oxidising agents and foodstuffs. Keep storage vessels closed when not in use. Take precautionary measures against electrostatic discharges.

7.3 Specific end use(s)

No information provided.

8. EXPOSURE CONTROLS / PERSONAL PROTECTION

8.1 Control parameters

Exposure standards

Ingredient	Reference	TWA		STEL	
		ppm	mg/m ³	ppm	mg/m ³
Bitumen fume	SWA (AUS)	--	5	--	--
Hydrogen Sulphide	SWA (AUS)	10	14	15	21

Biological limits

No biological limit values have been entered for this product.

8.2 Exposure controls

Engineering controls Avoid inhalation by working upwind where possible. Use in well ventilated areas. Maintain vapour /fume levels below the recommended exposure standard.

PPE

Personal protective equipment (PPE) should meet recommended national standards. Check with PPE suppliers.

Eye / Face Hot material: to prevent thermal burns wear a helmet, full face visor and heat resistant neck flap / apron. Cold material: wear safety glasses with side shields. Chemical splash goggles.

Hands Hot material: to prevent thermal burns wear heat resistant and impervious gauntlets/gloves. Cold material: Wear chemical resistant gloves. Recommended: nitrile gloves.

Body Thermal resistant clothing will be required when handling hot products.

Respiratory Where an inhalation risk exists, wear a Type A-Class P1 (Organic gases/vapours and Particulate) respirator.



9. PHYSICAL AND CHEMICAL PROPERTIES

9.1 Information on basic physical and chemical properties

Appearance	VISCOUS BLACK LIQUID
Odour	HYDROCARBON ODOUR
Flammability	COMBUSTIBLE

9.1 Information on basic physical and chemical properties

Flash point	> 230°C
Boiling point	NOT AVAILABLE
Melting point	NOT AVAILABLE
Evaporation rate	NOT AVAILABLE
pH	NOT AVAILABLE
Vapour density	NOT AVAILABLE
Specific gravity	NOT AVAILABLE
Solubility (water)	INSOLUBLE
Vapour pressure	NOT AVAILABLE
Upper explosion limit	NOT AVAILABLE
Lower explosion limit	NOT AVAILABLE
Partition coefficient	NOT AVAILABLE
Autoignition temperature	NOT AVAILABLE
Decomposition temperature	NOT AVAILABLE
Viscosity	NOT AVAILABLE
Explosive properties	NOT AVAILABLE
Oxidising properties	NOT AVAILABLE
Odour threshold	NOT AVAILABLE

10. STABILITY AND REACTIVITY**10.1 Reactivity**

Carefully review all information provided in sections 10.2 to 10.6.

10.2 Chemical stability

Stable under recommended conditions of storage.

10.3 Possibility of hazardous reactions

Polymerization is not expected to occur.

10.4 Conditions to avoid

Avoid heat, sparks, open flames and other ignition sources.

10.5 Incompatible materials

Incompatible with oxidising agents (e.g. hypochlorites) and acids (e.g. nitric acid).

10.6 Hazardous decomposition products

May evolve toxic gases (carbon/ sulphur/ nitrogen oxides, hydrogen sulphide, hydrocarbons) when heated to decomposition.

11. TOXICOLOGICAL INFORMATION**11.1 Information on toxicological effects**

Acute toxicity No known toxicity data is available for this product. Based on available data, the classification criteria are not met. Inhalation may cause headache, nausea and respiratory tract irritation. Once cured, the inert solid material is considered non hazardous.

Information available for the ingredient(s):

Ingredient	Oral Toxicity (LD50)	Dermal Toxicity (LD50)	Inhalation Toxicity (LC50)
HYDROGEN SULPHIDE	--	--	712 ppm
RESIDUES, PETROLEUM, VACUUM	> 5 g/kg (rat)	> 2 g/kg (rabbit)	--

Skin Contact with hot material may cause skin burns. Exposure to asphalt fumes may cause dermatitis and photosensitisation. Once cured, the inert semi solid material is considered non hazardous.

Eye Contact with hot material may cause eye burns. Exposure to asphalt fumes may cause irritation, redness or pain. Once cured, the inert semi solid material is unlikely to penetrate the eye and considered non hazardous.

Sensitisation Not classified as causing skin or respiratory sensitisation.

Mutagenicity Insufficient data available to classify as a mutagen.

Carcinogenicity Bitumens, occupational exposure to straight-run bitumens and their emissions during road paving, are classified as possibly carcinogenic to humans (IARC Group 2B).

Reproductive Insufficient data available to classify as a reproductive toxin.

PRODUCT NAME BITUMEN

STOT - single exposure	Not classified as causing organ damage from single exposure. However, inhalation of bitumen fumes may cause headache, nausea and respiratory tract irritation. This material may release trace quantities of hydrogen sulphide within storage facilities.
STOT - repeated exposure	Not classified as causing organ damage from repeated exposure.
Aspiration	Not expected to present an aspiration hazard.

12. ECOLOGICAL INFORMATION

12.1 Toxicity

The bulk of the bitumen dispersed in asphalt is fairly inert when set, and should not present an environmental hazard under normal conditions.

12.2 Persistence and degradability

This product is not readily biodegradable.

12.3 Bioaccumulative potential

This product is not expected to bioaccumulate through food chains in the environment.

12.4 Mobility in soil

Spillages are unlikely to penetrate the soil.

12.5 Other adverse effects

Avoid contamination of drains and waterways.

13. DISPOSAL CONSIDERATIONS

13.1 Waste treatment methods

Waste disposal	For small amounts dispose of to an approved landfill site. Contact the manufacturer for additional information if larger amounts are involved. Prevent contamination of drains and waterways as aquatic life may be threatened and environmental damage may result.
Legislation	Dispose of in accordance with relevant local legislation.

14. TRANSPORT INFORMATION

CLASSIFIED AS A DANGEROUS GOOD BY THE CRITERIA OF THE ADG CODE



	LAND TRANSPORT (ADG)	SEA TRANSPORT (IMDG / IMO)	AIR TRANSPORT (IATA / ICAO)
14.1 UN Number	3257	3257	3257
14.2 Proper Shipping Name	ELEVATED TEMPERATURE LIQUID, N.O.S., at or above 100°C and below its flash point (including molten metals, molten salts, etc.)	ELEVATED TEMPERATURE LIQUID, N.O.S., at or above 100°C and below its flash point (including molten metals, molten salts, etc.)	ELEVATED TEMPERATURE LIQUID, N.O.S., at or above 100°C and below its flash point (including molten metals, molten salts, etc.)
14.3 Transport hazard class	9	9	9
14.4 Packing Group	III	III	III

14.5 Environmental hazards

No information provided.

14.6 Special precautions for user

Hazchem code	2W
GTEPG	9A1
EMS	F-A, S-P

15. REGULATORY INFORMATION

15.1 Safety, health and environmental regulations/legislation specific for the substance or mixture

Poison schedule	A poison schedule number has not been allocated to this product using the criteria in the Standard for the Uniform Scheduling of Medicines and Poisons (SUSMP).
Classifications	Safework Australia criteria is based on the Globally Harmonised System (GHS) of Classification and Labelling of Chemicals. The classifications and phrases listed below are based on the Approved Criteria for Classifying Hazardous Substances [NOHSC: 1008(2004)].
Hazard codes	None allocated.
Risk phrases	None allocated.
Safety phrases	None allocated.
Inventory listing(s)	AUSTRALIA: AICS (Australian Inventory of Chemical Substances) All components are listed on AICS, or are exempt.

16. OTHER INFORMATION

Additional information PERSONAL PROTECTIVE EQUIPMENT GUIDELINES:
The recommendation for protective equipment contained within this report is provided as a guide only. Factors such as form of product, method of application, working environment, quantity used, product concentration and the availability of engineering controls should be considered before final selection of personal protective equipment is made.

HEALTH EFFECTS FROM EXPOSURE:

It should be noted that the effects from exposure to this product will depend on several factors including: form of product; frequency and duration of use; quantity used; effectiveness of control measures; protective equipment used and method of application. Given that it is impractical to prepare a report which would encompass all possible scenarios, it is anticipated that users will assess the risks and apply control methods where appropriate.

Abbreviations	ACGIH	American Conference of Governmental Industrial Hygienists
	CAS #	Chemical Abstract Service number - used to uniquely identify chemical compounds
	CNS	Central Nervous System
	EC No.	EC No - European Community Number
	EMS	Emergency Schedules (Emergency Procedures for Ships Carrying Dangerous Goods)
	GHS	Globally Harmonized System
	GTEPG	Group Text Emergency Procedure Guide
	IARC	International Agency for Research on Cancer
	LC50	Lethal Concentration, 50% / Median Lethal Concentration
	LD50	Lethal Dose, 50% / Median Lethal Dose
	mg/m ³	Milligrams per Cubic Metre
	OEL	Occupational Exposure Limit
	pH	relates to hydrogen ion concentration using a scale of 0 (high acidic) to 14 (highly alkaline).
	ppm	Parts Per Million
	STEL	Short-Term Exposure Limit
	STOT-RE	Specific target organ toxicity (repeated exposure)
	STOT-SE	Specific target organ toxicity (single exposure)
	SUSMP	Standard for the Uniform Scheduling of Medicines and Poisons
	SWA	Safe Work Australia
	TLV	Threshold Limit Value
	TWA	Time Weighted Average

PRODUCT NAME BITUMEN

Report status

This document has been compiled by RMT on behalf of the manufacturer, importer or supplier of the product and serves as their Safety Data Sheet ('SDS').

It is based on information concerning the product which has been provided to RMT by the manufacturer, importer or supplier or obtained from third party sources and is believed to represent the current state of knowledge as to the appropriate safety and handling precautions for the product at the time of issue. Further clarification regarding any aspect of the product should be obtained directly from the manufacturer, importer or supplier.

While RMT has taken all due care to include accurate and up-to-date information in this SDS, it does not provide any warranty as to accuracy or completeness. As far as lawfully possible, RMT accepts no liability for any loss, injury or damage (including consequential loss) which may be suffered or incurred by any person as a consequence of their reliance on the information contained in this SDS.

Prepared by

Risk Management Technologies
5 Ventnor Ave, West Perth
Western Australia 6005
Phone: +61 8 9322 1711
Fax: +61 8 9322 1794
Email: info@rmt.com.au
Web: www.rmt.com.au

[End of SDS]

SAFETY DATA SHEET

Automotive Diesel Fuel



Section 1. Identification

GHS product identifier	Automotive Diesel Fuel
Other means of identification	⚠️10, BP 10 ppm diesel fuel, Ultra Low Sulphur diesel fuel, Automotive Diesel fuel, AD20, AD40, Alpine Diesel and Biodiesel up to B5.
Product code	0000002718
SDS no.	0000002718
Historic SDS no.	AD0K1
Relevant identified uses of the substance or mixture and uses advised against	
Use of the substance/mixture	Fuel for compression ignition diesel engines.
Manufacturer	
Supplier	BP Australia Pty Ltd Level 17, 717 Bourke Street Docklands, Victoria 3008 ABN 53 004 085 616 www.bp.com.au Technical Helpline Number: 1300 139 700
EMERGENCY TELEPHONE NUMBER	1800 638 556

Section 2. Hazard(s) identification

Classification of the substance or mixture	⚠️FLAMMABLE LIQUIDS - Category 4 ACUTE TOXICITY (inhalation) - Category 4 SKIN CORROSION/IRRITATION - Category 2 CARCINOGENICITY - Category 2 SPECIFIC TARGET ORGAN TOXICITY - REPEATED EXPOSURE (bone marrow, liver, thymus) - Category 2 ASPIRATION HAZARD - Category 1
---	--

GHS label elements

Hazard pictograms



Signal word

DANGER

Hazard statements

H227 - Combustible liquid.
H332 - Harmful if inhaled.
H315 - Causes skin irritation.
H351 - Suspected of causing cancer.
H304 - May be fatal if swallowed and enters airways.
H373 - May cause damage to organs through prolonged or repeated exposure. (bone marrow, liver, thymus)

Precautionary statements

General

P103 - Read label before use.
P102 - Keep out of reach of children.
P101 - If medical advice is needed, have product container or label at hand.

Product name Automotive Diesel Fuel	Product code 0000002718	Page: 1/13
Version 3	Date of issue 8/6/2019	Format Australia
	(Australia)	Language ENGLISH
		(ENGLISH)

Section 2. Hazard(s) identification

Prevention	P201 - Obtain special instructions before use. P260 - Do not breathe vapour. P280 - Wear protective gloves. Wear eye or face protection. Wear protective clothing. P210 - Keep away from heat, hot surfaces, sparks, open flames and other ignition sources. No smoking. P240 - Ground/bond container and receiving equipment. P273 - Avoid release to the environment.
Response	P314 - Get medical attention if you feel unwell. P308 + P313 - IF exposed or concerned: Get medical attention. P304 + P340 + P312 - IF INHALED: Remove victim to fresh air and keep at rest in a position comfortable for breathing. Call a POISON CENTER or physician if you feel unwell. P301 + P310 + P331 - IF SWALLOWED: Immediately call a POISON CENTER or physician. Do NOT induce vomiting. P302 + P352 + P362 + P363 - IF ON SKIN: Wash with plenty of soap and water. Take off contaminated clothing. Wash contaminated clothing before reuse. P332 + P313 - If skin irritation occurs: Get medical attention.
Storage	P405 - Store locked up. P403 - Store in a well-ventilated place. P235 - Keep cool.
Disposal	P501 - Dispose of contents and container in accordance with all local, regional, national and international regulations.
Supplemental label elements	Not applicable.
Other hazards which do not result in classification	This material may contain significant quantities of polycyclic aromatic hydrocarbons, some of which have been shown by experimental studies to induce skin cancer. Note: High Pressure Applications Injections through the skin resulting from contact with the product at high pressure constitute a major medical emergency. See 'Notes to physician' under First-Aid Measures, Section 4 of this Safety Data Sheet.

Section 3. Composition and ingredient information

Substance/mixture Mixture

May contain Fatty Acid Methyl Esters (FAME). May also contain small quantities of proprietary performance additives. Contains small quantities of polycyclic aromatic hydrocarbons (PAHs).

Ingredient name	% (w/w)	CAS number
Fuels, diesel	> 95	68334-30-5
Alkanes, C10-20-branched and linear	0 - 20	928771-01-1

There are no additional ingredients present which, within the current knowledge of the supplier and in the concentrations applicable, are classified as hazardous to health or the environment and hence require reporting in this section.

Occupational exposure limits, if available, are listed in Section 8.

Section 4. First aid measures

Description of necessary first aid measures

Eye contact	In case of contact, immediately flush eyes with plenty of water for at least 15 minutes. Eyelids should be held away from the eyeball to ensure thorough rinsing. Check for and remove any contact lenses. Get medical attention.
Inhalation	If inhaled, remove to fresh air. If not breathing, if breathing is irregular or if respiratory arrest occurs, provide artificial respiration or oxygen by trained personnel. Get medical attention.

Product name Automotive Diesel Fuel

Product code 0000002718 **Page:** 2/13

Version 3 **Date of issue** 8/6/2019

Format Australia

Language ENGLISH

(Australia)

(ENGLISH)

Section 4. First aid measures

Skin contact

In case of contact, immediately flush skin with plenty of water for at least 15 minutes while removing contaminated clothing and shoes. Drench contaminated clothing with water before removing. This is necessary to avoid the risk of sparks from static electricity that could ignite contaminated clothing. Contaminated clothing is a fire hazard. Contaminated leather, particularly footwear, must be discarded. Clean shoes thoroughly before reuse. Get medical attention.

Ingestion

Do not induce vomiting. Never give anything by mouth to an unconscious person. If unconscious, place in recovery position and get medical attention immediately. Aspiration hazard if swallowed. Can enter lungs and cause damage. Get medical attention immediately.

Most important symptoms/effects, acute and delayed

See Section 11 for more detailed information on health effects and symptoms.

Indication of immediate medical attention and special treatment needed, if necessary

Notes to physician

Treatment should in general be symptomatic and directed to relieving any effects. Product can be aspirated on swallowing or following regurgitation of stomach contents, and can cause severe and potentially fatal chemical pneumonitis, which will require urgent treatment. Because of the risk of aspiration, induction of vomiting and gastric lavage should be avoided. Gastric lavage should be undertaken only after endotracheal intubation. Monitor for cardiac dysrhythmias.

Note: High Pressure Applications

Injections through the skin resulting from contact with the product at high pressure constitute a major medical emergency. Injuries may not appear serious at first but within a few hours tissue becomes swollen, discoloured and extremely painful with extensive subcutaneous necrosis.

Surgical exploration should be undertaken without delay. Thorough and extensive debridement of the wound and underlying tissue is necessary to minimise tissue loss and prevent or limit permanent damage. Note that high pressure may force the product considerable distances along tissue planes.

Specific treatments

No specific treatment.

Protection of first-aiders

No action shall be taken involving any personal risk or without suitable training. If it is suspected that fumes are still present, the rescuer should wear an appropriate mask or self-contained breathing apparatus. It may be dangerous to the person providing aid to give mouth-to-mouth resuscitation.

Section 5. Firefighting measures

Extinguishing media

Suitable extinguishing media

In case of fire, use water fog, foam, dry chemical or carbon dioxide extinguisher or spray.

Unsuitable extinguishing media

Do not use water jet.

Specific hazards arising from the chemical

Combustible liquid. Fire water contaminated with this material must be contained and prevented from being discharged to any waterway, sewer or drain. In a fire or if heated, a pressure increase will occur and the container may burst, with the risk of a subsequent explosion. Runoff to sewer may create fire or explosion hazard.

Hazardous thermal decomposition products

Combustion products may include the following:
carbon oxides (CO, CO₂) (carbon monoxide, carbon dioxide)
other hazardous substances.

Special protective actions for fire-fighters

No action shall be taken involving any personal risk or without suitable training. Promptly isolate the scene by removing all persons from the vicinity of the incident if there is a fire. Move containers from fire area if this can be done without risk. Use water spray to keep fire-exposed containers cool.

Section 5. Firefighting measures

Special protective equipment for fire-fighters	Fire-fighters should wear positive pressure self-contained breathing apparatus (SCBA) and full turnout gear.
Hazchem code	3z

Section 6. Accidental release measures

Personal precautions, protective equipment and emergency procedures

For non-emergency personnel	Immediately contact emergency personnel. No action shall be taken involving any personal risk or without suitable training. Evacuate surrounding areas. Keep unnecessary and unprotected personnel from entering. Do not touch or walk through spilled material. No flares, smoking or flames in hazard area. Avoid breathing vapour or mist. Provide adequate ventilation. Put on appropriate personal protective equipment. Floors may be slippery; use care to avoid falling. Eliminate all ignition sources.
For emergency responders	Entry into a confined space or poorly ventilated area contaminated with vapour, mist or fume is extremely hazardous without the correct respiratory protective equipment and a safe system of work. Wear self-contained breathing apparatus. Wear a suitable chemical protective suit. Chemical resistant boots. See also the information in "For non-emergency personnel".

Environmental precautions	Avoid dispersal of spilled material and runoff and contact with soil, waterways, drains and sewers. Inform the relevant authorities if the product has caused environmental pollution (sewers, waterways, soil or air). Water polluting material. May be harmful to the environment if released in large quantities.
----------------------------------	--

Methods and material for containment and cleaning up

Small spill	Eliminate all ignition sources. Stop leak if without risk. Move containers from spill area. Absorb with an inert material and place in an appropriate waste disposal container. Use spark-proof tools and explosion-proof equipment. Dispose of via a licensed waste disposal contractor. The method and equipment used must be in conformance with appropriate regulations and industry practice on explosive atmospheres.
Large spill	Eliminate all ignition sources. Stop leak if without risk. Move containers from spill area. Approach the release from upwind. Prevent entry into sewers, water courses, basements or confined areas. Dike spill area and do not allow product to reach sewage system and surface or ground water. Contain and collect spillage with non-combustible, absorbent material e.g. sand, earth, vermiculite or diatomaceous earth and place in container for disposal according to local regulations. Use spark-proof tools and explosion-proof equipment. Contaminated absorbent material may pose the same hazard as the spilled product. The method and equipment used must be in conformance with appropriate regulations and industry practice on explosive atmospheres. Dispose of via a licensed waste disposal contractor.

Section 7. Handling and storage

Precautions for safe handling

Protective measures	Put on appropriate personal protective equipment (see Section 8). Avoid exposure - obtain special instructions before use. Do not handle until all safety precautions have been read and understood. Do not get in eyes or on skin or clothing. Do not breathe vapour or mist. Do not swallow. Aspiration hazard if swallowed. Can enter lungs and cause damage. Never siphon by mouth. Use only with adequate ventilation. Wear appropriate respirator when ventilation is inadequate. Keep in the original container or an approved alternative made from a compatible material, kept tightly closed when not in use. Store and use away from heat, sparks, open flame or any other ignition source. Use explosion-proof electrical (ventilating, lighting and material handling) equipment. Use only non-sparking tools. Empty containers retain product residue and can be hazardous. Do not reuse container. Avoid contact of spilled material and runoff with soil and surface waterways.
----------------------------	---

Product name Automotive Diesel Fuel	Product code 000002718	Page: 4/13	
Version 3	Date of issue 8/6/2019	Format Australia	Language ENGLISH
		(Australia)	(ENGLISH)

Section 7. Handling and storage

Advice on general occupational hygiene

Eating, drinking and smoking should be prohibited in areas where this material is handled, stored and processed. Wash thoroughly after handling. Remove contaminated clothing and protective equipment before entering eating areas. See also Section 8 for additional information on hygiene measures.

Conditions for safe storage, including any incompatibilities

Store in accordance with local regulations. Store in a segregated and approved area. Store in original container protected from direct sunlight in a dry, cool and well-ventilated area, away from incompatible materials (see Section 10) and food and drink. Store locked up. Eliminate all ignition sources. Separate from oxidising materials. Keep container tightly closed and sealed until ready for use. Store and use only in equipment/containers designed for use with this product. Containers that have been opened must be carefully resealed and kept upright to prevent leakage. Do not store in unlabelled containers. Use appropriate containment to avoid environmental contamination.

Take precautions to avoid static electrical discharge and all ignition sources during filling, ullaging and sampling from storage tanks. Do not enter storage tanks. If entry to vessels is necessary, follow permit to work procedures. When the product is pumped (e.g. during filling, discharge or ullaging) and when sampling, there is a risk of static discharge. Ensure equipment used is properly earthed or bonded to the tank structure. Use of explosion-protected electrical, ventilating, lighting and all material-handling equipment should be considered. Explosive air/vapour mixtures may form at ambient temperatures on contact with hot surfaces. Keep away from heat, hot surfaces, sparks, open flames and other ignition sources.

Product contaminated rags, paper or material used to absorb spillages, represent a fire hazard, and should not be allowed to accumulate. Dispose of safely immediately after use. Entry into a confined space or poorly ventilated area contaminated with vapour, mist or fume is extremely hazardous without the correct respiratory protective equipment and a safe system of work.

Classified as a C1 (COMBUSTIBLE LIQUID) for the purpose of storage and handling, in accordance with the requirements of AS 1940. Refer to State Regulations for storage and transport requirements.

Section 8. Exposure controls and personal protection

Control parameters

Occupational exposure limits

Ingredient name	Exposure limits
Fuels, diesel	ACGIH TLV (United States). Absorbed through skin. TWA: 100 mg/m ³ , (measured as total hydrocarbons) 8 hours. Issued/Revised: 1/2007 Form: Inhalable fraction and vapor

Appropriate engineering controls

All activities involving chemicals should be assessed for their risks to health, to ensure exposures are adequately controlled. Personal protective equipment should only be considered after other forms of control measures (e.g. engineering controls) have been suitably evaluated. Personal protective equipment should conform to appropriate standards, be suitable for use, be kept in good condition and properly maintained.

Your supplier of personal protective equipment should be consulted for advice on selection and appropriate standards. For further information contact your national organisation for standards.

Provide exhaust ventilation or other engineering controls to keep the relevant airborne concentrations below their respective occupational exposure limits.

Product name Automotive Diesel Fuel

Product code 0000002718

Page: 5/13

Version 3

Date of issue 8/6/2019

Format Australia

Language ENGLISH

(Australia)

(ENGLISH)

Section 8. Exposure controls and personal protection

Environmental exposure controls	<p>The final choice of protective equipment will depend upon a risk assessment. It is important to ensure that all items of personal protective equipment are compatible.</p> <p>Emissions from ventilation or work process equipment should be checked to ensure they comply with the requirements of environmental protection legislation. In some cases, fume scrubbers, filters or engineering modifications to the process equipment will be necessary to reduce emissions to acceptable levels.</p>
Individual protection measures	
Hygiene measures	<p>Wash hands, forearms and face thoroughly after handling chemical products, before eating, smoking and using the lavatory and at the end of the working period. Appropriate techniques should be used to remove potentially contaminated clothing. Wash contaminated clothing before reusing. Ensure that eyewash stations and safety showers are close to the workstation location.</p>
Eye/face protection	<p>Chemical splash goggles.</p>
Skin protection	
Hand protection	<p>Wear chemical resistant gloves.</p> <p>Protective gloves must give suitable protection against mechanical risks (i.e. abrasion, blade cut and puncture). Protective gloves will deteriorate over time due to physical and chemical damage. Inspect and replace gloves on a regular basis. The frequency of replacement will depend upon the circumstances of use.</p> <p>Recommended: Nitrile gloves.</p>
Skin protection	<p>Recommended: overall</p> <p>Use of protective clothing is good industrial practice. Personal protective equipment for the body should be selected based on the task being performed and the risks involved and should be approved by a specialist before handling this product.</p> <p>Cotton or polyester/cotton overalls will only provide protection against light superficial contamination that will not soak through to the skin. Overalls should be laundered on a regular basis. When the risk of skin exposure is high (e.g. when cleaning up spillages or if there is a risk of splashing) then chemical resistant aprons and/or impervious chemical suits and boots will be required.</p> <p>Wear suitable protective clothing.</p> <p>Footwear highly resistant to chemicals.</p> <p>When there is a risk of ignition wear inherently fire resistant protective clothes and gloves.</p> <p>When there is a risk of ignition from static electricity, wear anti-static protective clothing. For greatest effectiveness against static electricity, overalls, boots and gloves should all be anti-static.</p> <p>When the risk of skin exposure is high (from experience this could apply to the following tasks: cleaning work, maintenance and service, filling and transfer, taking samples and cleaning up spillages) then a chemical protective suit and boots will be required.</p> <p>Work clothing / overalls should be laundered on a regular basis. Laundering of contaminated work clothing should only be done by professional cleaners who have been told about the hazards of the contamination. Always keep contaminated work clothing away from uncontaminated work clothing and uncontaminated personal clothes.</p>
Other skin protection	<p>Appropriate footwear and any additional skin protection measures should be selected based on the task being performed and the risks involved and should be approved by a specialist before handling this product.</p>
Respiratory protection	<p>Use with adequate ventilation.</p> <p>If there is a requirement for the use of a respiratory protective device, but the use of breathing apparatus (independent of ambient atmosphere) is not required, then a suitable filtering device must be worn.</p> <p>The filter class must be suitable for the maximum contaminant concentration (gas/vapour/aerosol/particulates) that may arise when handling the product.</p> <p>Recommended: If ventilation is inadequate, use respirator that will protect against organic vapour and dust/mist.</p>

Section 8. Exposure controls and personal protection

[Refer to standards:](#)

Respiratory protection:AS/NZS 1715 and AS/NZS 1716
Gloves:AS/NZS 2161.1
Eye protection:AS/NZS 1336 and AS/NZS 1337

Section 9. Physical and chemical properties

[Appearance](#)

Physical state	Liquid.
Colour	Water white to straw including fluorescent green, blue or yellow.
Odour	Mild
Odour threshold	0.7 ppm (Based on Fuels, diesel)
pH	Not applicable. Based on Solubility in Water (Very slightly soluble in water)
Melting point	-29 to -18°C (-20.2 to -0.4°F) (Based on Fuels, diesel)
Boiling point	180 to 380°C (356 to 716°F)
Flash point	Closed cup: >61.5°C (>142.7°F) [Pensky-Martens.]
Evaporation rate	Not relevant/applicable due to nature of the product. Based on low volatility
Flammability (solid, gas)	Not applicable. Based on - Physical state
Lower and upper explosive (flammable) limits	Lower: 0.5% Upper: 7.5%
Vapour pressure	0.1 kPa (0.755 mm Hg) (Based on Concawe Category: Vacuum Gas Oils, Hydrocracked Gas Oils & Distillate Fuels (VHGO))
Vapour density	Not available.
Relative density	0.83
Density	820 to 850 kg/m ³ (0.82 to 0.85 g/cm ³) at 15°C
Solubility	Very slightly soluble in water
Partition coefficient: n-octanol/water	Not applicable. Based on Fuels, diesel - Substance is a hydrocarbon UVCB. Standard tests for this endpoint are intended for single substances and are not appropriate for this complex substance.
Auto-ignition temperature	240°C (464°F) (Based on Fuels, diesel)
Decomposition temperature	Not observed to decompose by final boiling point: 380°C (716°F)
Viscosity	Kinematic: 2 to 4.5 mm ² /s (2 to 4.5 cSt) at 40°C

Section 10. Stability and reactivity

Reactivity	No specific test data available for this product. Refer to Conditions to avoid and Incompatible materials for additional information.
Chemical stability	The product is stable.
Possibility of hazardous reactions	Under normal conditions of storage and use, hazardous reactions will not occur. Under normal conditions of storage and use, hazardous polymerisation will not occur.
Conditions to avoid	Avoid all possible sources of ignition (spark or flame). Avoid excessive heat.
Incompatible materials	Reactive or incompatible with the following materials: oxidising materials.
Hazardous decomposition products	Under normal conditions of storage and use, hazardous decomposition products should not be produced.

Section 11. Toxicological information

[Information on toxicological effects](#)

[Acute toxicity](#)

Product/ingredient name	Result	Species	Dose	Exposure
-------------------------	--------	---------	------	----------

Product name Automotive Diesel Fuel	Product code 0000002718	Page: 7/13	
Version 3	Date of issue 8/6/2019	Format Australia	Language ENGLISH
		(Australia)	(ENGLISH)

Section 11. Toxicological information

Fuels, diesel	LC50 Inhalation Dusts and mists	Rat	4.1 mg/l	4 hours
	LD50 Dermal	Rabbit	>4300 mg/kg	-
	LD50 Dermal	Rabbit	>4300 mg/kg	-
	LD50 Oral	Rat	17900 mg/kg	-
	LD50 Oral	Rat	7600 mg/kg	-

Irritation/Corrosion

Product/ingredient name	Result	Species	Score	Exposure	Observation
Fuels, diesel	Skin - Irritation	Rabbit	-	-	-
	Skin - Irritation	Rabbit	-	-	-
	Eyes - Non-irritating to the eyes.	Rabbit	-	-	-
	Eyes - Non-irritating to the eyes.	Rabbit	-	-	-

Skin

Causes skin irritation.

Sensitisation

Product/ingredient name	Route of exposure	Species	Result
Fuels, diesel	skin	Guinea pig	Not sensitising
	skin	Guinea pig	Not sensitising

Mutagenicity

Product/ingredient name	Test	Experiment	Result
Fuels, diesel	OECD 471	Experiment: In vitro Subject: Non-mammalian species	Positive
	Equivalent to OECD 476	Experiment: In vitro Subject: Mammalian-Animal Cell: Germ	Negative
	not guideline	Experiment: In vivo Subject: Unspecified Cell: Somatic	Negative

Conclusion/Summary

Not classified. Based on available data, the classification criteria are not met.

Carcinogenicity

Product/ingredient name	Result	Species	Dose	Exposure
Fuels, diesel	Positive - Dermal - Unspecified	Mouse	-	2 years

Conclusion/Summary

Suspected of causing cancer.

Reproductive toxicity

Product/ingredient name	Maternal toxicity	Fertility	Developmental toxin	Species	Dose	Exposure
Fuels, diesel	-	-	Negative	Rat	Dermal	20 days
	-	-	Negative	Rat	Dermal	10 days
	-	-	Negative	Rat	Dermal	10 days

Conclusion/Summary

Development: Not classified. Based on available data, the classification criteria are not met.

Fertility: Not classified. Based on available data, the classification criteria are not met.

Effects on or via lactation: Not classified. Based on available data, the classification criteria are not met.

Specific target organ toxicity (repeated exposure)

Name	Category	Route of exposure	Target organs
------	----------	-------------------	---------------

Section 11. Toxicological information

Fuels, diesel

Category 2

Not determined

bone marrow, liver
and thymus

Aspiration hazard

Name

Fuels, diesel
Alkanes, C10-20-branched and linear

Result

ASPIRATION HAZARD - Category 1
ASPIRATION HAZARD - Category 1

Information on likely routes of exposure

Routes of entry anticipated: Oral, Dermal, Inhalation.

Potential acute health effects

Eye contact

No known significant effects or critical hazards.

Inhalation

Harmful if inhaled.

Skin contact

Causes skin irritation.

Ingestion

Irritating to mouth, throat and stomach. Aspiration hazard if swallowed -- harmful or fatal if liquid is aspirated into lungs.

Symptoms related to the physical, chemical and toxicological characteristics

Eye contact

Adverse symptoms may include the following:
pain or irritation
watering
redness

Inhalation

Adverse symptoms may include the following:
nausea or vomiting
headache
drowsiness/fatigue
dizziness/vertigo
unconsciousness

Skin contact

Adverse symptoms may include the following:
irritation
redness

Ingestion

Adverse symptoms may include the following:
nausea or vomiting

Delayed and immediate effects as well as chronic effects from short and long-term exposure

Eye contact

Vapour, mist or fume may cause eye irritation. Exposure to vapour, mist or fume may cause stinging, redness and watering of the eyes.

Inhalation

Vapour, mists or fumes may contain polycyclic aromatic hydrocarbons some of which are known to produce skin cancer. Vapour, mists or fumes may contain polycyclic aromatic hydrocarbons some of which are known to produce skin cancer. Vapour, mist or fume may irritate the nose, mouth and respiratory tract.

Skin contact

As with all such products containing potentially harmful levels of polycyclic aromatic hydrocarbons, prolonged or repeated skin contact may eventually result in dermatitis or more serious irreversible skin disorders including cancer.

Ingestion

If swallowed, may irritate the mouth, throat and digestive system. If swallowed, may cause abdominal pain, stomach cramps, nausea, vomiting, diarrhoea, dizziness and drowsiness.

General

May cause damage to organs through prolonged or repeated exposure. Vapour, mists or fumes may contain polycyclic aromatic hydrocarbons some of which are known to produce skin cancer. Vapour, mists or fumes may contain polycyclic aromatic hydrocarbons some of which are known to produce skin cancer.

Carcinogenicity

Suspected of causing cancer. Risk of cancer depends on duration and level of exposure.

Mutagenicity

No known significant effects or critical hazards.

Teratogenicity

No known significant effects or critical hazards.

Product name Automotive Diesel Fuel

Product code 000002718

Page: 9/13

Version 3 **Date of issue** 8/6/2019

Format Australia

Language ENGLISH

(Australia)

(ENGLISH)

Section 11. Toxicological information

Developmental effects No known significant effects or critical hazards.

Fertility effects No known significant effects or critical hazards.

Numerical measures of toxicity

Acute toxicity estimates

Route	ATE value
Inhalation (dusts and mists)	1.89 mg/l

Section 12. Ecological information

Toxicity

Product/ingredient name	Result	Species	Exposure
Fuels, diesel	EL50 >1000 mg/l Nominal Fresh water	Micro-organism	40 hours
	NOELR 3.217 mg/l Nominal Fresh water	Micro-organism	40 hours
	Acute EL50 22 mg/l Nominal Fresh water	Algae	72 hours
	Acute EL50 210 mg/l Nominal Fresh water	Daphnia	48 hours
	Acute EL50 68 mg/l Nominal Fresh water	Daphnia	48 hours
	Acute ErL50 78 mg/l Nominal Fresh water	Algae	72 hours
	Acute LL50 65 mg/l Nominal Fresh water	Fish	96 hours
	Acute LL50 21 mg/l Nominal Fresh water	Fish	96 hours
	Acute NOELR 10 mg/l Nominal Fresh water	Algae	72 hours
	Acute NOELR 1 mg/l Nominal Fresh water	Algae	72 hours
	Acute NOELR 46 mg/l Nominal Fresh water	Daphnia	48 hours
	Chronic NOEL 0.083 mg/l Nominal Fresh water	Fish	14 days
	Chronic NOELR 0.2 mg/l Nominal Fresh water	Daphnia	21 days

Conclusion/Summary Toxic to aquatic life with long lasting effects.

Persistence and degradability

Expected to be biodegradable.

Product/ingredient name	Test	Result	Dose	Inoculum
Fuels, diesel	OECD 301 F	60 % - Readily - 28 days	30 mg/l	-
	OECD 301 F	57.5 % - Not readily - 28 days	25 mg/l	-
	Equivalent to EPA OTS 796.3100	35 % - Not readily - 28 days	5 mg/l	-

Conclusion/Summary Non-persistent per IMO criteria

Bioaccumulative potential

This product is not expected to bioaccumulate through food chains in the environment.

Product name Automotive Diesel Fuel

Product code 0000002718 **Page:** 10/13

Version 3 **Date of issue** 8/6/2019

Format Australia
(Australia)

Language ENGLISH
(ENGLISH)

Section 12. Ecological information

Mobility in soil

Soil/water partition coefficient (K_{oc}) Not available.

Mobility Spillages may penetrate the soil causing ground water contamination. This material may accumulate in sediments.



Other ecological information Spills may form a film on water surfaces causing physical damage to organisms. Oxygen transfer could also be impaired.

Section 13. Disposal considerations

Disposal methods The generation of waste should be avoided or minimised wherever possible. Significant quantities of waste product residues should not be disposed of via the foul sewer but processed in a suitable effluent treatment plant. Dispose of surplus and non-recyclable products via a licensed waste disposal contractor. Disposal of this product, solutions and any by-products should at all times comply with the requirements of environmental protection and waste disposal legislation and any regional local authority requirements. Waste packaging should be recycled. Incineration or landfill should only be considered when recycling is not feasible. This material and its container must be disposed of in a safe way. Care should be taken when handling emptied containers that have not been cleaned or rinsed out. Empty containers or liners may retain some product residues. Vapour from product residues may create a highly flammable or explosive atmosphere inside the container. Do not cut, weld or grind used containers unless they have been cleaned thoroughly internally. Avoid dispersal of spilt material and runoff and contact with soil, waterways, drains and sewers.

Special Precautions for Landfill or Incineration Empty packages may contain some remaining product. Hazard warning labels are a guide to the safe handling of empty packaging and should not be removed.

Section 14. Transport information

	ADG	IMDG	IATA
UN number	Not regulated.	UN3082	UN3082
UN proper shipping name	-	ENVIRONMENTALLY HAZARDOUS SUBSTANCE, LIQUID, N.O.S. (Fuels, diesel). Marine pollutant	ENVIRONMENTALLY HAZARDOUS SUBSTANCE, LIQUID, N.O.S. (Fuels, diesel)
Transport hazard class(es)	-	9 	9 
Packing group	-	III	III
Environmental hazards	No.	Yes.	Yes.
Additional information	<p>Remarks Combustible liquid Class C1 (AS 1940).</p> <p>Hazchem code 3Z</p> <p>Initial emergency response guide 47</p>	<p>This product is not regulated as a dangerous good when transported in sizes of ≤5 L or ≤5 kg, provided the packagings meet the general provisions of 4.1.1.1, 4.1.1.2 and 4.1.1.4 to 4.1.1.8.</p> <p>Emergency schedules F-A, S-F</p>	<p>This product is not regulated as a dangerous good when transported in sizes of ≤5 L or ≤5 kg, provided the packagings meet the general provisions of 5.0.2.4.1, 5.0.2.6.1.1 and 5.0.2.8.</p>

Product name Automotive Diesel Fuel

Product code 000002718 **Page:** 11/13

Version 3 **Date of issue** 8/6/2019

Format Australia
(Australia)

Language ENGLISH
(ENGLISH)

Section 14. Transport information

Special precautions for user Not available.

Transport in bulk according to Annex II of Marpol and the IBC Code **Proper shipping name**

MARPOL Annex 1 rules apply for bulk shipments by sea.
Category: gas oils, including ship's bunkers

Section 15. Regulatory information

Standard Uniform Schedule of Medicine and Poisons

Not scheduled

Consumer products - This product is exempt per Appendix A of the SUSMP.

Industrial Products - Labelling requirements for SUSMP do not apply to a poison that is packed and sold solely for industrial, laboratory or manufacturing use. However, this product is labelled in accordance with NOSHC National Code of Practice for labelling of workplace substances.

Model Work Health and Safety Regulations - Scheduled Substances

No listed substance

Montreal Protocol (Annexes A, B, C, E)

Ingredient name	List name	Status
Not listed.		

Stockholm Convention on Persistent Organic Pollutants

Ingredient name	List name	Status
Not listed.		

Rotterdam Convention on Prior Informed Consent (PIC)

Ingredient name	List name	Status
Not listed.		

International lists

National inventory

REACH Status

For the REACH status of this product please consult your company contact, as identified in Section 1.

Australia inventory (AICS)

All components are listed or exempted.

Canada inventory

All components are listed or exempted.

China inventory (IECSC)

Not determined.

Japan inventory (ENCS)

Not determined.

Korea inventory (KECI)

Not determined.

Philippines inventory (PICCS)

Not determined.

Taiwan Chemical Substances Inventory (TCSI)

All components are listed or exempted.

United States inventory (TSCA 8b)

All components are active or exempted.

Product name Automotive Diesel Fuel

Product code 0000002718 **Page:** 12/13

Version 3 **Date of issue** 8/6/2019

Format Australia
(Australia)

Language ENGLISH
(ENGLISH)

Section 16. Any other relevant information

History

Date of printing 8/6/2019

Date of issue/Date of revision 8/6/2019

Date of previous issue 5/25/2016

Version 3

Prepared by Product Stewardship

Key to abbreviations

ADG = Australian Dangerous Goods
ATE = Acute Toxicity Estimate
BCF = Bioconcentration Factor
GHS = Globally Harmonized System of Classification and Labelling of Chemicals
IATA = International Air Transport Association
IBC = Intermediate Bulk Container
IMDG = International Maritime Dangerous Goods
LogPow = logarithm of the octanol/water partition coefficient
MARPOL = International Convention for the Prevention of Pollution From Ships, 1973 as modified by the Protocol of 1978. ("Marpol" = marine pollution)
NOHSC = National Occupational Health and Safety Commission
REACH = Registration, Evaluation, Authorisation and Restriction of Chemicals Regulation [Regulation (EC) No. 1907/2006]
STEL = Short term exposure limit
SUSMP = Standard Uniform Schedule of Medicine and Poisons
UN = United Nations
TWA = Time weighted average
VOC = Volatile Organic Compound
SADT = Self-Accelerating Decomposition Temperature
Varies = may contain one or more of the following 64741-88-4, 64741-89-5, 64741-95-3, 64741-96-4, 64742-01-4, 64742-44-5, 64742-45-6, 64742-52-5, 64742-53-6, 64742-54-7, 64742-55-8, 64742-56-9, 64742-57-0, 64742-58-1, 64742-62-7, 64742-63-8, 64742-65-0, 64742-70-7, 72623-85-9, 72623-86-0, 72623-87-1

Procedure used to derive the classification

Classification	Justification
Flam. Liq. 4, H227 Acute Tox. 4, H332 Skin Irrit. 2, H315 Carc. 2, H351 STOT RE 2, H373 (bone marrow, liver, thymus) Asp. Tox. 1, H304	On basis of test data Calculation method Calculation method Calculation method Calculation method Calculation method

Indicates information that has changed from previously issued version.

Notice to reader

All reasonably practicable steps have been taken to ensure this data sheet and the health, safety and environmental information contained in it is accurate as of the date specified below. No warranty or representation, express or implied is made as to the accuracy or completeness of the data and information in this data sheet.

The data and advice given apply when the product is sold for the stated application or applications. You should not use the product other than for the stated application or applications without seeking advice from BP Group.

It is the user's obligation to evaluate and use this product safely and to comply with all applicable laws and regulations. The BP Group shall not be responsible for any damage or injury resulting from use, other than the stated product use of the material, from any failure to adhere to recommendations, or from any hazards inherent in the nature of the material. Purchasers of the product for supply to a third party for use at work, have a duty to take all necessary steps to ensure that any person handling or using the product is provided with the information in this sheet. Employers have a duty to tell employees and others who may be affected of any hazards described in this sheet and of any precautions that should be taken. You can contact the BP Group to ensure that this document is the most current available. Alteration of this document is strictly prohibited.

Product name Automotive Diesel Fuel

Product code 0000002718

Page: 13/13

Version 3 Date of issue 8/6/2019

Format Australia
(Australia)

Language ENGLISH
(ENGLISH)

1. IDENTIFICATION OF THE MATERIAL AND SUPPLIER

1.1 Product identifier

Product name PROPANE
Synonyms 087 - SDS NUMBER • DIMETHYLMETHANE • LIQUEFIED PETROLEUM GAS • LPG • N-PROPANE •
PRODUCT CODES: 152, 153 • PROPYL HYDRIDE • PROPYLHYDRIDE

1.2 Uses and uses advised against

Uses FUEL

1.3 Details of the supplier of the product

Supplier name BOC LIMITED (AUSTRALIA)
Address 10 Julius Avenue, North Ryde, NSW, 2113, AUSTRALIA
Telephone 131 262, (02) 8874 4400
Fax 132 427 (24 hours)
Website <http://www.boc.com.au>

1.4 Emergency telephone numbers

Emergency 1800 653 572 (24/7) (Australia only)

2. HAZARDS IDENTIFICATION

2.1 Classification of the substance or mixture

CLASSIFIED AS HAZARDOUS ACCORDING TO SAFE WORK AUSTRALIA CRITERIA

Physical Hazards

Flammable Gases: Category 1A
Gases Under Pressure: Liquefied gas

Health Hazards

Not classified as a Health Hazard

Environmental Hazards

Not classified as an Environmental Hazard

2.2 GHS Label elements

Signal word DANGER

Pictograms



Hazard statements

H220 Extremely flammable gas.
H280 Contains gas under pressure; may explode if heated.

Prevention statements

P210 Keep away from heat, hot surfaces, sparks, open flames and other ignition sources. No smoking.

Response statements

P377 Leaking gas fire: Do not extinguish, unless leak can be stopped safely.
P381 In case of leakage, eliminate all ignition sources.

PRODUCT NAME PROPANE**Storage statements**

P403 Store in a well-ventilated place.

Disposal statements

None allocated.

2.3 Other hazards

Asphyxiant. Effects are proportional to oxygen displacement.

3. COMPOSITION/ INFORMATION ON INGREDIENTS

3.1 Substances / Mixtures

Ingredient	CAS Number	EC Number	Content (v/v)
PROPANE	74-98-6	200-827-9	>99%

4. FIRST AID MEASURES

4.1 Description of first aid measures

Eye	Cold burns: Immediately flush with tepid water or with sterile saline solution. Hold eyelids apart and irrigate for 15 minutes. Seek medical attention.
Inhalation	If inhaled, remove from contaminated area. To protect rescuer, use an Air-line respirator or Self Contained Breathing Apparatus (SCBA). Be aware of possible explosive atmospheres. Apply artificial respiration if not breathing. Give oxygen if available. For advice, contact a Poisons Information Centre on 13 11 26 (Australia Wide) or a doctor.
Skin	Cold burns: Remove contaminated clothing and gently flush affected areas with warm water (30°C) for 15 minutes. It is recommended that warm water is applied to clothing before removing it so as to prevent further skin damage. Apply sterile dressing and treat as for a thermal burn. For large burns, immerse in warm water for 15 minutes. DO NOT apply any form of direct heat. Seek immediate medical attention.
Ingestion	Due to product form and application, ingestion is considered unlikely.
First aid facilities	Eye wash facilities and safety shower should be available.

4.2 Most important symptoms and effects, both acute and delayed

In high concentrations may cause asphyxiation. Direct contact with the liquefied material or escaping compressed gas may cause frostbite injury.

4.3 Immediate medical attention and special treatment needed

Treat symptomatically.

5. FIRE FIGHTING MEASURES

5.1 Extinguishing media

Stop flow of gas if safe to do so, such as by slowly closing the cylinder valve.

5.2 Special hazards arising from the substance or mixture

Extremely flammable. Eliminate all ignition sources including cigarettes, open flames, spark producing switches/tools, heaters, naked lights, pilot lights, mobile phones etc. when handling.

5.3 Advice for firefighters

Temperatures in a fire may cause cylinders to rupture and internal pressure relief devices to be activated. Cool cylinders or containers exposed to fire by applying water from a protected location. Do not approach cylinders or containers suspected of being hot. This material is capable of forming explosive mixtures in air.

5.4 Hazchem code

2YE	
2	Fine Water Spray.
Y	Risk of violent reaction or explosion. Wear full fire kit and breathing apparatus. Contain spill and run-off.
E	Evacuation of people in and around the immediate vicinity of the incident should be considered.

6. ACCIDENTAL RELEASE MEASURES

PRODUCT NAME PROPANE

6.1 Personal precautions, protective equipment and emergency procedures

If the cylinder is leaking, evacuate area of personnel. Inform manufacturer/supplier of leak. Use Personal Protective Equipment (PPE) as detailed in Section 8 of the SDS. Ventilate area where possible and eliminate ignition sources.

6.2 Environmental precautions

Prevent from entering sewers, basements and workpits, or any place where its accumulation can be dangerous.

6.3 Methods of cleaning up

Stop the flow of material, if this is without risk. If the leak is irreparable, move the cylinder to a safe and well ventilated area, and allow to discharge. Keep area evacuated and free from ignition sources until any leaked or spilled liquid has evaporated.

6.4 Reference to other sections

See Sections 8 and 13 for exposure controls and disposal.

7. HANDLING AND STORAGE

7.1 Precautions for safe handling

Before use carefully read the product label. Use of safe work practices are recommended to avoid eye or skin contact and inhalation. Observe good personal hygiene, including washing hands before eating. Prohibit eating, drinking and smoking in contaminated areas.

7.2 Conditions for safe storage, including any incompatibilities

Do not store near incompatible substances and sources of ignition. Cylinders should be stored: upright, prevented from falling, in a secure area; below 65°C, in a dry, well ventilated area constructed of non-combustible material with firm level floor (preferably concrete), away from areas of heavy traffic and emergency exits.

7.3 Specific end uses

No information provided.

8. EXPOSURE CONTROLS / PERSONAL PROTECTION

8.1 Control parameters

Exposure standards

Ingredient	Reference	TWA		STEL	
		ppm	mg/m ³	ppm	mg/m ³
Propane	SWA [AUS]	Asphyxiant			

Biological limits

No biological limit values have been entered for this product.

8.2 Exposure controls

Engineering controls Avoid inhalation. Use in well ventilated areas. Where an inhalation risk exists, mechanical explosion proof extraction ventilation is recommended.

PPE

Eye / Face	Wear safety glasses.
Hands	Wear leather or insulated gloves.
Body	Wear coveralls.
Respiratory	Where an inhalation risk exists, wear Self Contained Breathing Apparatus (SCBA) or an Air-line respirator.



9. PHYSICAL AND CHEMICAL PROPERTIES

9.1 Information on basic physical and chemical properties

Appearance	COLOURLESS GAS
Odour	SLIGHT ODOUR
Flammability	EXTREMELY FLAMMABLE

PRODUCT NAME PROPANE**9.1 Information on basic physical and chemical properties**

Flash point	-105°C
Boiling point	-42°C
Melting point	-190°C
Evaporation rate	NOT APPLICABLE
pH	NOT APPLICABLE
Vapour density	1.55 (Air = 1)
Relative density	NOT APPLICABLE
Solubility (water)	SLIGHTLY SOLUBLE
Vapour pressure	871 kPa @ 20°C
Upper explosion limit	9.5 %
Lower explosion limit	2.1 %
Partition coefficient	NOT AVAILABLE
Autoignition temperature	450°C
Decomposition temperature	NOT AVAILABLE
Viscosity	NOT AVAILABLE
Explosive properties	NOT AVAILABLE
Oxidising properties	NOT AVAILABLE
Odour threshold	NOT AVAILABLE

9.2 Other information

% Volatiles	100 %
-------------	-------

10. STABILITY AND REACTIVITY

10.1 Reactivity

Carefully review all information provided in sections 10.2 to 10.6.

10.2 Chemical stability

Stable under recommended conditions of storage.

10.3 Possibility of hazardous reactions

Polymerization will not occur.

10.4 Conditions to avoid

Avoid heat, sparks, open flames and other ignition sources.

10.5 Incompatible materials

Incompatible with oxidising agents (e.g. hypochlorites), acids (e.g. nitric acid), heat and ignition sources. Do not use natural rubber flexible hoses. Also incompatible (potentially violently) with oxygen, halogens and metal halides. Compatible with most common metals.

10.6 Hazardous decomposition products

May evolve toxic gases if heated to decomposition.

11. TOXICOLOGICAL INFORMATION

11.1 Information on toxicological effects

Acute toxicity No known toxicological effects from this product. Based on available data, the classification criteria are not met.

Information available for the ingredients:

Ingredient	Oral LD50	Dermal LD50	Inhalation LC50
PROPANE	Study not feasible	Study not feasible	> 800000 ppm/15M (rat)

Skin Not classified as a skin irritant. Contact with the liquefied material or escaping compressed gas may cause frostbite injury.

Eye Not classified as an eye irritant. Contact with the liquefied material or escaping compressed gas may cause frostbite injury.

Sensitisation Not classified as causing skin or respiratory sensitisation.

Mutagenicity Not classified as a mutagen.

Carcinogenicity Not classified as a carcinogen.

Reproductive Not classified as a reproductive toxin.

PRODUCT NAME PROPANE

STOT - single exposure	Asphyxiant. Effects are proportional to oxygen displacement. Over exposure may result in dizziness, drowsiness, weakness, fatigue, breathing difficulties and unconsciousness.
STOT - repeated exposure	Not classified as causing organ damage from repeated exposure.
Aspiration	Not classified as causing aspiration.

12. ECOLOGICAL INFORMATION

12.1 Toxicity

No information provided.

12.2 Persistence and degradability

No information provided.

12.3 Bioaccumulative potential

No information provided.

12.4 Mobility in soil

No information provided.

12.5 Other adverse effects

Gas at standard temperature and pressure and is expected to partition primarily to air.

13. DISPOSAL CONSIDERATIONS

13.1 Waste treatment methods**Waste disposal** Cylinders should be returned to the manufacturer or supplier for disposal of contents.**Legislation** Dispose of in accordance with relevant local legislation.

14. TRANSPORT INFORMATION

CLASSIFIED AS A DANGEROUS GOOD BY THE CRITERIA OF THE ADG CODE



	LAND TRANSPORT (ADG)	SEA TRANSPORT (IMDG / IMO)	AIR TRANSPORT (IATA / ICAO)
14.1 UN Number	1978	1978	1978
14.2 Proper Shipping Name	PROPANE	PROPANE	PROPANE
14.3 Transport hazard class	2.1	2.1	2.1
14.4 Packing Group	None allocated.	None allocated.	None allocated.

14.5 Environmental hazards

No information provided.

14.6 Special precautions for user**Hazchem code** 2YE**GTEPG** 2A2**EmS** F-D, S-U**Other information** Ensure cylinder is separated from driver and that outlet of relief device is not obstructed.

15. REGULATORY INFORMATION

PRODUCT NAME PROPANE

15.1 Safety, health and environmental regulations/legislation specific for the substance or mixture

Poison schedule	A poison schedule number has not been allocated to this product using the criteria in the Standard for the Uniform Scheduling of Medicines and Poisons (SUSMP).
Classifications	Safe Work Australia criteria is based on the Globally Harmonised System (GHS) of Classification and Labelling of Chemicals (GHS Revision 7).
Inventory listings	AUSTRALIA: AIC (Australian Inventory of Industrial Chemicals) All components are listed on AIC, or are exempt.

16. OTHER INFORMATION

Additional information The storage of significant quantities of gas cylinders must comply with AS4332 The storage and handling of gases in cylinders.

ASPHYXIANTS (1): When present in the atmospheres in high concentrations, asphyxiants reduce the oxygen concentration by displacement. Atmospheres deficient in oxygen do not provide adequate sensory warning of danger and most simple asphyxiants are odourless. Therefore it is not appropriate to recommend an exposure standard for each asphyxiant, but to maintain oxygen concentrations. However, some asphyxiants may be given an exposure standard due to the potential for narcotic effects at high concentrations or an explosion hazard.

ASPHYXIANTS (2): There is a significant hazard associated with workers entering poorly ventilated areas (e.g. tanks) where oxygen may be deficient. An air supplied breathing apparatus may be required if adequate ventilation is not ensured.

PERSONAL PROTECTIVE EQUIPMENT GUIDELINES:

The recommendation for protective equipment contained within this report is provided as a guide only. Factors such as form of product, method of application, working environment, quantity used, product concentration and the availability of engineering controls should be considered before final selection of personal protective equipment is made.

HEALTH EFFECTS FROM EXPOSURE:

It should be noted that the effects from exposure to this product will depend on several factors including: form of product; frequency and duration of use; quantity used; effectiveness of control measures; protective equipment used and method of application. Given that it is impractical to prepare a report which would encompass all possible scenarios, it is anticipated that users will assess the risks and apply control methods where appropriate.

Abbreviations

ACGIH	American Conference of Governmental Industrial Hygienists
CAS #	Chemical Abstract Service number - used to uniquely identify chemical compounds
CNS	Central Nervous System
EC No.	EC No - European Community Number
EMS	Emergency Schedules (Emergency Procedures for Ships Carrying Dangerous Goods)
GHS	Globally Harmonized System
GTEPG	Group Text Emergency Procedure Guide
IARC	International Agency for Research on Cancer
LC50	Lethal Concentration, 50% / Median Lethal Concentration
LD50	Lethal Dose, 50% / Median Lethal Dose
mg/m ³	Milligrams per Cubic Metre
OEL	Occupational Exposure Limit
pH	relates to hydrogen ion concentration using a scale of 0 (highly acidic) to 14 (highly alkaline).
ppm	Parts Per Million
STEL	Short-Term Exposure Limit
STOT-RE	Specific target organ toxicity (repeated exposure)
STOT-SE	Specific target organ toxicity (single exposure)
SUSMP	Standard for the Uniform Scheduling of Medicines and Poisons
SWA	Safe Work Australia
TLV	Threshold Limit Value
TWA	Time Weighted Average

PRODUCT NAME PROPANE

Report status

This document has been compiled by RMT on behalf of the manufacturer, importer or supplier of the product and serves as their Safety Data Sheet ('SDS').

It is based on information concerning the product which has been provided to RMT by the manufacturer, importer or supplier or obtained from third party sources and is believed to represent the current state of knowledge as to the appropriate safety and handling precautions for the product at the time of issue. Further clarification regarding any aspect of the product should be obtained directly from the manufacturer, importer or supplier.

While RMT has taken all due care to include accurate and up-to-date information in this SDS, it does not provide any warranty as to accuracy or completeness. As far as lawfully possible, RMT accepts no liability for any loss, injury or damage (including consequential loss) which may be suffered or incurred by any person as a consequence of their reliance on the information contained in this SDS.

Prepared by

Risk Management Technologies
5 Ventnor Ave, West Perth
Western Australia 6005
Phone: +61 8 9322 1711
Fax: +61 8 9322 1794
Email: info@rmt.com.au
Web: www.rmtglobal.com

[End of SDS]

1. IDENTIFICATION OF THE MATERIAL AND SUPPLIER

1.1 Product identifier

Product name OXYGEN, COMPRESSED
Synonyms 076 - SDS NUMBER • BOC OXYGEN, COMPRESSED • CPG401205E, CPG402819G - MATERIAL NUMBER(S) • OXYGEN • OXYGEN COMPRESSED • PRODUCT CODES: 020, 024, 025, 026, 027, 028, 128, 224, 226

1.2 Uses and uses advised against

Uses CHEMICAL REAGENT • COMBUSTION AID • FUEL ADDITIVE • INDUSTRIAL APPLICATIONS • LASER APPLICATIONS

1.3 Details of the supplier of the product

Supplier name BOC LIMITED (AUSTRALIA)
Address 10 Julius Avenue, North Ryde, NSW, 2113, AUSTRALIA
Telephone 131 262, (02) 8874 4400
Fax 132 427 (24 hours)
Website <http://www.boc.com.au>

1.4 Emergency telephone numbers

Emergency 1800 653 572 (24/7) (Australia only)

2. HAZARDS IDENTIFICATION

2.1 Classification of the substance or mixture

CLASSIFIED AS HAZARDOUS ACCORDING TO SAFE WORK AUSTRALIA CRITERIA

Physical Hazards

Oxidizing Gases: Category 1
Gases Under Pressure: Compressed gas

Health Hazards

Not classified as a Health Hazard

Environmental Hazards

Not classified as an Environmental Hazard

2.2 GHS Label elements

Signal word DANGER

Pictograms



Hazard statements

H270 May cause or intensify fire; oxidizer.
H280 Contains gas under pressure; may explode if heated.

Prevention statements

P220 Keep away from clothing and other combustible materials.
P244 Keep valves and fittings free from oil and grease.

PRODUCT NAME OXYGEN, COMPRESSED

Response statements

P370 + P376 In case of fire: Stop leak if safe to do so.

Storage statements

P403 Store in a well-ventilated place.

Disposal statements

None allocated.

2.3 Other hazards

No information provided.

3. COMPOSITION/ INFORMATION ON INGREDIENTS

3.1 Substances / Mixtures

Ingredient	CAS Number	EC Number	Content (v/v)
OXYGEN	7782-44-7	231-956-9	>99.5%

4. FIRST AID MEASURES

4.1 Description of first aid measures

Eye Adverse effects not expected from this product.

Inhalation If inhaled, remove from contaminated area. Apply artificial respiration if not breathing. For advice, contact a Poisons Information Centre on 13 11 26 (Australia Wide) or a doctor.

Skin Adverse effects not expected from this product.

Ingestion Due to product form and application, ingestion is considered unlikely.

First aid facilities None allocated.

4.2 Most important symptoms and effects, both acute and delayed

Continuous inhalation of concentrations higher than 75% may cause nausea, dizziness, respiratory difficulty and convulsion.

4.3 Immediate medical attention and special treatment needed

Treatment for hyperoxia.

5. FIRE FIGHTING MEASURES

5.1 Extinguishing media

Use water fog to cool containers from protected area.

5.2 Special hazards arising from the substance or mixture

Non flammable - oxidising agent. Supports combustion and may cause fire/explosion in contact with incompatible substances, strong acids, reducing agents, combustibles and flammables. Materials which burn in air, will burn more vigorously in oxygen enriched atmospheres.

5.3 Advice for firefighters

Temperatures in a fire may cause cylinders to rupture and internal pressure relief devices to be activated. Cool cylinders or containers exposed to fire by applying water from a protected location. Do not approach cylinders or containers suspected of being hot. Remove cool cylinders from the path of the fire if safe to do so. Ensure working area is well ventilated before re-use. Notify the manufacturer that you will be returning a faulty cylinder. Residual product will be disposed of when the cylinder is returned.

5.4 Hazchem code

2S
2 Fine Water Spray.
S Risk of violent reaction or explosion. Wear full fire kit and breathing apparatus. Dilute spill and run-off.

6. ACCIDENTAL RELEASE MEASURES

6.1 Personal precautions, protective equipment and emergency procedures

If the cylinder is leaking, evacuate area of personnel. Inform manufacturer/supplier of leak. Use Personal Protective Equipment (PPE) as detailed in Section 8 of the SDS.

PRODUCT NAME OXYGEN, COMPRESSED

6.2 Environmental precautions

Prevent from entering sewers, basements and workpits, or any place where its accumulation can be dangerous.

6.3 Methods of cleaning up

Carefully move material to a well ventilated remote area, then allow to discharge if safe to do so. Do not attempt to repair leaking valve or cylinder safety devices.

6.4 Reference to other sections

See Sections 8 and 13 for exposure controls and disposal.

7. HANDLING AND STORAGE

7.1 Precautions for safe handling

Use of safe work practices are recommended to avoid inhalation. Do not drag, drop, slide or roll cylinders. The uncontrolled release of a gas under pressure may cause physical harm. Use a suitable hand truck for cylinder movement.

7.2 Conditions for safe storage, including any incompatibilities

Do not store near sources of ignition or incompatible materials. Cylinders should be stored below 65°C in a secure area, upright and restrained to prevent cylinders from falling. Cylinders should also be stored in a dry, well ventilated area constructed of non-combustible material with firm level floor (preferably concrete), away from areas of heavy traffic and emergency exits.

7.3 Specific end uses

No information provided.

8. EXPOSURE CONTROLS / PERSONAL PROTECTION

8.1 Control parameters

Exposure standards

No exposure standards have been entered for this product.

Biological limits

No biological limit values have been entered for this product.

8.2 Exposure controls

Engineering controls No special precautions are normally required when handling this product.

PPE

Eye / Face	Wear safety glasses.
Hands	Wear leather gloves.
Body	Wear safety boots.
Respiratory	Not required under normal conditions of use.



9. PHYSICAL AND CHEMICAL PROPERTIES

9.1 Information on basic physical and chemical properties

Appearance	COLOURLESS GAS
Odour	ODOURLESS
Flammability	NON FLAMMABLE
Flash point	NOT RELEVANT
Boiling point	-183°C
Melting point	NOT AVAILABLE
Evaporation rate	NOT APPLICABLE
pH	NOT APPLICABLE
Vapour density	NOT AVAILABLE
Relative density	NOT APPLICABLE
Solubility (water)	0.032 cm ³ /cm ³

PRODUCT NAME OXYGEN, COMPRESSED

9.1 Information on basic physical and chemical properties

Vapour pressure	NOT AVAILABLE
Upper explosion limit	NOT RELEVANT
Lower explosion limit	NOT RELEVANT
Partition coefficient	NOT AVAILABLE
Autoignition temperature	NOT AVAILABLE
Decomposition temperature	NOT AVAILABLE
Viscosity	NOT AVAILABLE
Explosive properties	NOT AVAILABLE
Oxidising properties	OXIDISING GAS
Odour threshold	NOT AVAILABLE

9.2 Other information

% Volatiles	100 %
Critical pressure	5,043 kPa
Critical temperature	-118.6°C (Permanent gas)
Cylinder pressure (when full)	Refer to Product Manuals
Density	1.105 (Air = 1)

10. STABILITY AND REACTIVITY

10.1 Reactivity

Unreactive under normal conditions.

10.2 Chemical stability

Stable under recommended conditions of storage.

10.3 Possibility of hazardous reactions

Polymerization will not occur.

10.4 Conditions to avoid

Avoid heat, sparks, open flames and other ignition sources.

10.5 Incompatible materials

Combustible materials such as oil and grease can spontaneously ignite at low temperatures in oxygen enriched atmospheres. Materials which burn in air, will burn more vigorously in oxygen enriched atmospheres. Metals can be ignited and will continue to burn in pure oxygen atmospheres under specific conditions of temperature and pressure.

10.6 Hazardous decomposition products

This material will not decompose to form hazardous products other than that already present.

11. TOXICOLOGICAL INFORMATION

11.1 Information on toxicological effects

Acute toxicity	Based on available data, the classification criteria are not met.
Skin	Not classified as a skin irritant.
Eye	Not classified as an eye irritant.
Sensitisation	Not classified as causing skin or respiratory sensitisation.
Mutagenicity	Not classified as a mutagen.
Carcinogenicity	Not classified as a carcinogen.
Reproductive	Not classified as a reproductive toxin.
STOT - single exposure	Not classified as causing organ damage from single exposure.
STOT - repeated exposure	Continuous inhalation of concentrations higher than 75% may cause nausea, dizziness, respiratory difficulty and convulsion.
Aspiration	Not classified as causing aspiration.

12. ECOLOGICAL INFORMATION

12.1 Toxicity

No ecological damage caused by this product.

PRODUCT NAME OXYGEN, COMPRESSED

12.2 Persistence and degradability

Not applicable.

12.3 Bioaccumulative potential

Not applicable.

12.4 Mobility in soil

The substance is a gas, not applicable.

12.5 Other adverse effects

No information provided.

13. DISPOSAL CONSIDERATIONS

13.1 Waste treatment methods

Waste disposal Cylinders should be returned to the manufacturer or supplier for disposal of contents.

Legislation Dispose of in accordance with relevant local legislation.

14. TRANSPORT INFORMATION

CLASSIFIED AS A DANGEROUS GOOD BY THE CRITERIA OF THE ADG CODE



	LAND TRANSPORT (ADG)	SEA TRANSPORT (IMDG / IMO)	AIR TRANSPORT (IATA / ICAO)
14.1 UN Number	1072	1072	1072
14.2 Proper Shipping Name	OXYGEN, COMPRESSED	OXYGEN, COMPRESSED	OXYGEN, COMPRESSED
14.3 Transport hazard classes	2.2 (5.1)	2.2 (5.1)	2.2 (5.1)
14.4 Packing Group	None allocated.	None allocated.	None allocated.

14.5 Environmental hazards

No information provided.

14.6 Special precautions for user

Hazchem code 2S

GTEPG 2C6

EmS F-C, S-W

Other information Ensure cylinder is separated from driver and foodstuffs. Refer to Commonwealth, State and Territory Dangerous Goods Legislation which contain requirements which affect gas storage and transport.

15. REGULATORY INFORMATION

15.1 Safety, health and environmental regulations/legislation specific for the substance or mixture

Poison schedule A poison schedule number has not been allocated to this product using the criteria in the Standard for the Uniform Scheduling of Medicines and Poisons (SUSMP).

Classifications Safe Work Australia criteria is based on the Globally Harmonised System (GHS) of Classification and Labelling of Chemicals (GHS Revision 7).

Inventory listings **AUSTRALIA: AIIC (Australian Inventory of Industrial Chemicals)**
All components are listed on AIIC, or are exempt.

16. OTHER INFORMATION

PRODUCT NAME OXYGEN, COMPRESSED

Additional information The storage of significant quantities of gas cylinders must comply with AS4332 The storage and handling of gases in cylinders.

APPLICATION METHOD: Gas regulator of suitable pressure and flow rating fitted to cylinder or manifold with low pressure gas distribution to equipment.

PERSONAL PROTECTIVE EQUIPMENT GUIDELINES:

The recommendation for protective equipment contained within this report is provided as a guide only. Factors such as form of product, method of application, working environment, quantity used, product concentration and the availability of engineering controls should be considered before final selection of personal protective equipment is made.

HEALTH EFFECTS FROM EXPOSURE:

It should be noted that the effects from exposure to this product will depend on several factors including: form of product; frequency and duration of use; quantity used; effectiveness of control measures; protective equipment used and method of application. Given that it is impractical to prepare a report which would encompass all possible scenarios, it is anticipated that users will assess the risks and apply control methods where appropriate.

Abbreviations

ACGIH	American Conference of Governmental Industrial Hygienists
CAS #	Chemical Abstract Service number - used to uniquely identify chemical compounds
CNS	Central Nervous System
EC No.	EC No - European Community Number
EMS	Emergency Schedules (Emergency Procedures for Ships Carrying Dangerous Goods)
GHS	Globally Harmonized System
GTEPG	Group Text Emergency Procedure Guide
IARC	International Agency for Research on Cancer
LC50	Lethal Concentration, 50% / Median Lethal Concentration
LD50	Lethal Dose, 50% / Median Lethal Dose
mg/m ³	Milligrams per Cubic Metre
OEL	Occupational Exposure Limit
pH	relates to hydrogen ion concentration using a scale of 0 (highly acidic) to 14 (highly alkaline).
ppm	Parts Per Million
STEL	Short-Term Exposure Limit
STOT-RE	Specific target organ toxicity (repeated exposure)
STOT-SE	Specific target organ toxicity (single exposure)
SUSMP	Standard for the Uniform Scheduling of Medicines and Poisons
SWA	Safe Work Australia
TLV	Threshold Limit Value
TWA	Time Weighted Average

Report status

This document has been compiled by RMT on behalf of the manufacturer, importer or supplier of the product and serves as their Safety Data Sheet ('SDS').

It is based on information concerning the product which has been provided to RMT by the manufacturer, importer or supplier or obtained from third party sources and is believed to represent the current state of knowledge as to the appropriate safety and handling precautions for the product at the time of issue. Further clarification regarding any aspect of the product should be obtained directly from the manufacturer, importer or supplier.

While RMT has taken all due care to include accurate and up-to-date information in this SDS, it does not provide any warranty as to accuracy or completeness. As far as lawfully possible, RMT accepts no liability for any loss, injury or damage (including consequential loss) which may be suffered or incurred by any person as a consequence of their reliance on the information contained in this SDS.

Prepared by

Risk Management Technologies
5 Ventnor Ave, West Perth
Western Australia 6005
Phone: +61 8 9322 1711
Fax: +61 8 9322 1794
Email: info@rmt.com.au
Web: www.rmtglobal.com

[End of SDS]



SAFETY DATA SHEET

Revision Date: 03-Aug-2018

Revision Number: 2

1. PRODUCT AND COMPANY IDENTIFICATION

Product Name FRESH START MULTI-PURPOSE OIL BASED PRIMER WHITE
Product Code 02400
Alternate Product Code 02400
Product Class SOLVENT THINNED PAINT
Color White
Recommended use Primers
Restrictions on use No information available

Manufacturer
Benjamin Moore & Co.
101 Paragon Drive
Montvale, NJ 07645
Phone: 1-866-708-9180
www.benjaminmoore.com

Emergency Telephone
CHEMTREC (US): 800-424-9300
CHEMTREC (outside US): (703)-527-3887

2. HAZARDS IDENTIFICATION

Classification

This chemical is considered hazardous by the 2012 OSHA Hazard Communication Standard (29 CFR 1910.1200)

Carcinogenicity	Category 1A
Specific target organ toxicity (repeated exposure)	Category 1
Aspiration toxicity	Category 1
Flammable liquids	Category 3

Label elements

Danger

Hazard statements

May cause cancer
Causes damage to organs through prolonged or repeated exposure
May be fatal if swallowed and enters airways
Flammable liquid and vapor



Appearance liquid

Odor solvent

Precautionary Statements - Prevention

Obtain special instructions before use
Do not handle until all safety precautions have been read and understood
Use personal protective equipment as required
Do not breathe dust/fume/gas/mist/vapors/spray
Wash face, hands and any exposed skin thoroughly after handling
Do not eat, drink or smoke when using this product
Keep away from heat, hot surfaces, sparks, open flames and other ignition sources. No smoking
Keep container tightly closed
Ground/bond container and receiving equipment
Use explosion-proof electrical/ventilating/lighting/equipment
Use only non-sparking tools
Take precautionary measures against static discharge

Precautionary Statements - Response

IF exposed or concerned: Get medical advice/attention

Skin

IF ON SKIN (or hair): Remove/Take off immediately all contaminated clothing. Rinse skin with water/shower

Ingestion

IF SWALLOWED: Immediately call a POISON CENTER or doctor/physician

Do NOT induce vomiting

Fire

In case of fire: Use CO2, dry chemical, or foam for extinction

Precautionary Statements - Storage

Store locked up
Store in a well-ventilated place. Keep cool

Precautionary Statements - Disposal

Dispose of contents/container to an approved waste disposal plant

Hazards not otherwise classified (HNOC)

Rags, steel wool or waste soaked with this product may spontaneously catch fire if improperly discarded

Other information

No information available

3. COMPOSITION/INFORMATION ON INGREDIENTS

Chemical name	CAS No.	Weight-%
Limestone	1317-65-3	45

Solvent naphtha, petroleum, medium aliphatic	64742-88-7	20
Titanium dioxide	13463-67-7	15
Hydrotreated heavy naphtha, petroleum	64742-48-9	10
Silica, crystalline	14808-60-7	0.5
Ethyl benzene	100-41-4	0.5

4. FIRST AID MEASURES

General Advice	If symptoms persist, call a physician. Show this safety data sheet to the doctor in attendance.
Eye Contact	Immediately flush with plenty of water. After initial flushing, remove any contact lenses and continue flushing for at least 15 minutes. Keep eye wide open while rinsing. If symptoms persist, call a physician.
Skin Contact	Wash off immediately with soap and plenty of water removing all contaminated clothes and shoes. If skin irritation persists, call a physician.
Inhalation	Move to fresh air. If symptoms persist, call a physician. If not breathing, give artificial respiration. Call a physician immediately.
Ingestion	Clean mouth with water and afterwards drink plenty of water. Do not induce vomiting without medical advice. Never give anything by mouth to an unconscious person. Consult a physician.
Protection Of First-Aiders	Use personal protective equipment.
Most Important Symptoms/Effects	No information available.
Notes To Physician	Treat symptomatically.

5. FIRE-FIGHTING MEASURES

Suitable Extinguishing Media	Foam, dry powder or water. Use extinguishing measures that are appropriate to local circumstances and the surrounding environment.
Protective Equipment And Precautions For Firefighters	As in any fire, wear self-contained breathing apparatus pressure-demand, MSHA/NIOSH (approved or equivalent) and full protective gear.
Specific Hazards Arising From The Chemical	Combustible material. Closed containers may rupture if exposed to fire or extreme heat. Keep product and empty container away from heat and sources of ignition. Thermal decomposition can lead to release of irritating gases and vapors.
Sensitivity To Mechanical Impact	No
Sensitivity To Static Discharge	Yes
Flash Point Data	

Flash Point (°F) 113
Flash Point (°C) 45
Method PMCC

Flammability Limits In Air

Lower flammability limit: Not available
Upper flammability limit: Not available

NFPA Health: 1 Flammability: 2 Instability: 0 Special: Not Applicable

NFPA Legend
0 - Not Hazardous
1 - Slightly
2 - Moderate
3 - High
4 - Severe

The ratings assigned are only suggested ratings, the contractor/employer has ultimate responsibilities for NFPA ratings where this system is used.

Additional information regarding the NFPA rating system is available from the National Fire Protection Agency (NFPA) at www.nfpa.org.

6. ACCIDENTAL RELEASE MEASURES

Personal Precautions Use personal protective equipment. Remove all sources of ignition.

Other Information Prevent further leakage or spillage if safe to do so. Do not allow material to contaminate ground water system. Prevent product from entering drains. Do not flush into surface water or sanitary sewer system. Local authorities should be advised if significant spillages cannot be contained.

Environmental precautions See Section 12 for additional Ecological Information.

Methods for Cleaning Up Dam up. Soak up with inert absorbent material. Pick up and transfer to properly labeled containers. Clean contaminated surface thoroughly.

7. HANDLING AND STORAGE

Handling Use only in area provided with appropriate exhaust ventilation. Do not breathe vapors or spray mist. Wear personal protective equipment. Take precautionary measures against static discharges. To avoid ignition of vapors by static electricity discharge, all metal parts of the equipment must be grounded. Keep away from open flames, hot surfaces and sources of ignition.

Storage Keep containers tightly closed in a dry, cool and well-ventilated place. Keep away from heat. Keep away from open flames, hot surfaces and sources of ignition. Keep in properly labeled containers. Keep out of the reach of children.

DANGER - Rags, steel wool or waste soaked with this product may spontaneously catch fire if improperly discarded. Immediately after use, place rags, steel wool or waste in a sealed water-filled metal container.

Incompatible Materials Incompatible with strong acids and bases and strong oxidizing agents.

8. EXPOSURE CONTROLS / PERSONAL PROTECTION

Exposure Limits

Chemical name	ACGIH TLV	OSHA PEL
Limestone	N/E	15 mg/m ³ - TWA 5 mg/m ³ - TWA
Titanium dioxide	10 mg/m ³ - TWA	15 mg/m ³ - TWA
Silica, crystalline	0.025 mg/m ³ - TWA	-
Ethyl benzene	20 ppm - TWA	100 ppm - TWA 435 mg/m ³ - TWA

Legend

ACGIH - American Conference of Governmental Industrial Hygienists Exposure Limits
OSHA - Occupational Safety & Health Administration Exposure Limits
N/E - Not Established

Engineering Measures

Ensure adequate ventilation, especially in confined areas.

Personal Protective Equipment

Eye/Face Protection

Safety glasses with side-shields.

Skin Protection

Long sleeved clothing. Protective gloves.

Respiratory Protection

In operations where exposure limits are exceeded, use a NIOSH approved respirator that has been selected by a technically qualified person for the specific work conditions. When spraying the product or applying in confined areas, wear a NIOSH approved respirator specified for paint spray or organic vapors.

Hygiene Measures

Avoid contact with skin, eyes and clothing. Remove and wash contaminated clothing before re-use. Wash thoroughly after handling. When using do not eat, drink or smoke.

9. PHYSICAL AND CHEMICAL PROPERTIES

Appearance	liquid
Odor	solvent
Odor Threshold	No information available
Density (lbs/gal)	11.75 - 11.85
Specific Gravity	1.41 - 1.43
pH	No information available
Viscosity (cps)	No information available
Solubility(ies)	No information available
Water solubility	No information available
Evaporation Rate	No information available
Vapor pressure @20 °C (kPa)	No information available
Vapor density	No information available
Wt. % Solids	70 - 80
Vol. % Solids	50 - 60
Wt. % Volatiles	20 - 30
Vol. % Volatiles	40 - 50
VOC Regulatory Limit (g/L)	<350
Boiling Point (°F)	275

Boiling Point (°C)	135
Freezing Point (°F)	No information available
Freezing Point (°C)	No information available
Flash Point (°F)	113
Flash Point (°C)	45
Method	PMCC
Flammability (solid, gas)	Not applicable
Upper flammability limit:	No information available
Lower flammability limit:	No information available
Autoignition Temperature (°F)	No information available
Autoignition Temperature (°C)	No information available
Decomposition Temperature (°F)	No information available
Decomposition Temperature (°C)	No information available
Partition coefficient	No information available

10. STABILITY AND REACTIVITY

Reactivity	Not Applicable
Chemical Stability	Stable under normal conditions. Hazardous polymerisation does not occur.
Conditions to avoid	Keep away from open flames, hot surfaces, static electricity and sources of ignition.
Incompatible Materials	Incompatible with strong acids and bases and strong oxidizing agents.
Hazardous Decomposition Products	Thermal decomposition can lead to release of irritating gases and vapors.
Possibility of hazardous reactions	None under normal conditions of use.

11. TOXICOLOGICAL INFORMATION

Product Information

Information on likely routes of exposure

Principal Routes of Exposure Eye contact, skin contact and inhalation.

Acute Toxicity

Product Information Repeated or prolonged exposure to organic solvents may lead to permanent brain and nervous system damage. Intentional misuse by deliberately concentrating and inhaling vapors may be harmful or fatal.

Symptoms related to the physical, chemical and toxicological characteristics

Symptoms No information available.

Delayed and immediate effects as well as chronic effects from short and long-term exposure

Eye contact	Contact with eyes may cause irritation.
Skin contact	May cause skin irritation and/or dermatitis. Prolonged skin contact may defat the skin and produce dermatitis.
Ingestion	Ingestion may cause irritation to mucous membranes. Small amounts of this product aspirated into the respiratory system during ingestion or vomiting may cause mild to severe pulmonary injury, possibly progressing to death.
Inhalation	High vapor / aerosol concentrations are irritating to the eyes, nose, throat and lungs and may cause headaches, dizziness, drowsiness, unconsciousness, and other central nervous system effects.
Sensitization	No information available.
Neurological Effects	No information available.
Mutagenic Effects	No information available.
Reproductive Effects	No information available.
Developmental Effects	No information available.
Target organ effects	No information available.
STOT - repeated exposure	Causes damage to organs through prolonged or repeated exposure if inhaled.
STOT - single exposure	No information available.
Other adverse effects	No information available.
Aspiration Hazard	May be harmful if swallowed and enters airways. Small amounts of this product aspirated into the respiratory system during ingestion or vomiting may cause mild to severe pulmonary injury, possibly progressing to death.

Numerical measures of toxicity

The following values are calculated based on chapter 3.1 of the GHS document

ATEmix (oral)	17951 mg/kg
ATEmix (dermal)	13465 mg/kg

Component Information

Acute Toxicity

Solvent naphtha, petroleum, medium aliphatic
 LD50 Oral: > 6240 mg/kg (Rat)
 LD50 Dermal: > 3120 mg/kg (Rabbit)
 LC50 Inhalation (Vapor): 1400 ppm (Rat, 4 hr.)
Titanium dioxide
 LD50 Oral: > 10000 mg/kg (Rat)
Hydrotreated heavy naphtha, petroleum
 LD50 Oral: > 5,000 mg/kg (Rat) vendor data
 LD50 Dermal: > 3,160 mg/kg (Rabbit)
Silica, crystalline
 LD50 Oral: 500 mg/kg (Rat)
Ethyl benzene
 LD50 Oral: mg/kg (Rat)
 LD50 Dermal: > mg/kg (Rabbit)
 LC50 Inhalation (Vapor): mg/m³ (Rat, 2 hr.)

Carcinogenicity

The information below indicates whether each agency has listed any ingredient as a carcinogen:.

Chemical name	IARC	NTP	OSHA
---------------	------	-----	------

Titanium dioxide	2B - Possible Human Carcinogen		Listed
Silica, crystalline	1 - Human Carcinogen	Known Human Carcinogen	Listed
Ethyl benzene	2B - Possible Human Carcinogen		Listed

- Crystalline Silica has been determined to be carcinogenic to humans by IARC (1) when in respirable form. Risk of cancer depends on duration and level of inhalation exposure to spray mist or dust from sanding the dried paint.
- Although IARC has classified titanium dioxide as possibly carcinogenic to humans (2B), their summary concludes: "No significant exposure to titanium dioxide is thought to occur during the use of products in which titanium dioxide is bound to other materials, such as paint."

Legend

IARC - International Agency for Research on Cancer
NTP - National Toxicity Program
OSHA - Occupational Safety & Health Administration

12. ECOLOGICAL INFORMATION

Ecotoxicity Effects

The environmental impact of this product has not been fully investigated.

Product Information

Acute Toxicity to Fish

No information available

Acute Toxicity to Aquatic Invertebrates

No information available

Acute Toxicity to Aquatic Plants

No information available

Persistence / Degradability

No information available.

Bioaccumulation

There is no data for this product.

Mobility in Environmental Media

No information available.

Ozone

No information available

Component Information

Acute Toxicity to Fish

Titanium dioxide

LC50: > 1000 mg/L (Fathead Minnow - 96 hr.)

Ethyl benzene

LC50: 12.1 mg/L (Fathead Minnow - 96 hr.)

Acute Toxicity to Aquatic Invertebrates

Ethyl benzene

EC50: 1.8 mg/L (Daphnia magna - 48 hr.)

Acute Toxicity to Aquatic Plants

Ethyl benzene

EC50: 4.6 mg/L (Green algae (Scenedesmus subspicatus), 72 hrs.)

13. DISPOSAL CONSIDERATIONS

Waste Disposal Method

Dispose of in accordance with federal, state, and local regulations. Local requirements may vary, consult your sanitation department or state-designated environmental protection agency for more disposal options.

Empty Container Warning

Emptied containers may retain product residue. Follow label warnings even after container is emptied. Residual vapors may explode on ignition.

14. TRANSPORT INFORMATION

DOT

Proper Shipping Name	PAINT
Hazard class	3
UN-No.	UN1263
Packing Group	III
Description	UN1263, PAINT, 3, III, Marine Pollutant (Solvent naphtha, petroleum, medium aliphatic,Hydrotreated heavy naphtha, petroleum)

In the US this material may be reclassified as a Combustible Liquid and is not regulated in containers of less than 119 gallons (450 liters) via surface transportation (refer to 49CFR173.120(b)(2) for further information).

ICAO / IATA

Contact the preparer for further information.

IMDG / IMO

Contact the preparer for further information.

15. REGULATORY INFORMATION

International Inventories

TSCA: United States

Yes - All components are listed or exempt.

DSL: Canada

Yes - All components are listed or exempt.

Federal Regulations

SARA 311/312 hazardous categorization

Acute health hazard

Yes

Chronic Health Hazard	Yes
Fire hazard	Yes
Sudden release of pressure hazard	No
Reactive Hazard	No

SARA 313

Section 313 of Title III of the Superfund Amendments and Reauthorization Act of 1986 (SARA). This product contains a chemical or chemicals which are subject to the reporting requirements of the Act and Title 40 of the Code of Federal Regulations, Part 372:

<u>Chemical name</u>	<u>CAS No.</u>	<u>Weight-%</u>	<u>CERCLA/SARA 313 (de minimis concentration)</u>
Ethyl benzene	100-41-4	0.5	0.1

Clean Air Act, Section 112 Hazardous Air Pollutants (HAPs) (see 40 CFR 61)

This product contains the following HAPs:

<u>Chemical name</u>	<u>CAS No.</u>	<u>Weight-%</u>	<u>Hazardous Air Pollutant (HAP)</u>
Ethyl benzene	100-41-4	0.5	Listed

US State Regulations

California Proposition 65

 **WARNING:** Cancer and Reproductive Harm– www.P65warnings.ca.gov

State Right-to-Know

Chemical name	Massachusetts	New Jersey	Pennsylvania
Limestone	X	X	X
Solvent naphtha, petroleum, medium aliphatic		X	
Titanium dioxide	X	X	X
Silica, crystalline	X	X	X

Legend

X - Listed

16. OTHER INFORMATION

HMIS - **Health: 1*** **Flammability: 2** **Reactivity: 0** **PPE: -**

HMIS Legend

- 0 - Minimal Hazard
- 1 - Slight Hazard
- 2 - Moderate Hazard
- 3 - Serious Hazard
- 4 - Severe Hazard

* - Chronic Hazard

X - Consult your supervisor or S.O.P. for "Special" handling instructions.

Note: The PPE rating has intentionally been left blank. Choose appropriate PPE that will protect employees from the hazards the material will present under the actual normal conditions of use.

Caution: HMIS® ratings are based on a 0-4 rating scale, with 0 representing minimal hazards or risks, and 4 representing significant hazards or risks. Although HMIS® ratings are not required on MSDSs under 29 CFR 1910.1200, the preparer, has chosen to provide them. HMIS® ratings are to be used only in conjunction with a fully implemented HMIS® program by workers who have received appropriate HMIS® training. HMIS® is a registered trade and service mark of the NPCA. HMIS® materials may be purchased exclusively from J. J. Keller (800) 327-6868.

WARNING! If you scrape, sand, or remove old paint, you may release lead dust. LEAD IS TOXIC. EXPOSURE TO LEAD DUST CAN CAUSE SERIOUS ILLNESS, SUCH AS BRAIN DAMAGE, ESPECIALLY IN CHILDREN. PREGNANT WOMEN SHOULD ALSO AVOID EXPOSURE. Wear a NIOSH approved respirator to control lead exposure. Clean up carefully with a HEPA vacuum and a wet mop. Before you start, find out how to protect yourself and your family by contacting the National Lead Information Hotline at 1-800-424-LEAD or log on to www.epa.gov/lead.

Prepared By Product Stewardship Department
Benjamin Moore & Co.
101 Paragon Drive
Montvale, NJ 07645
800-225-5554

Revision Date: 03-Aug-2018
Revision Summary Not available

Disclaimer

The information contained herein is presented in good faith and believed to be accurate as of the effective date shown above. This information is furnished without warranty of any kind. Employers should use this information only as a supplement to other information gathered by them and must make independent determination of suitability and completeness of information from all sources to assure proper use of these materials and the safety and health of employees. Any use of this data and information must be determined by the user to be in accordance with applicable federal, provincial, and local laws and regulations.

END OF SAFETY DATA SHEET

